



→ Reversible air-to-water heat pump

**“Simple, reliable,
efficient heat pump!
Equipped with CS controller”**



Heating nominal capacity : 4 to 15kW
Cooling nominal capacity : 3 to 16kW



Cooling or heating



* except three-phase models

USE

The **EREBA** air-to-water heat pump is designed for heating and cooling applications in new, existing individual homes and small businesses models.

When installed alone, EREBA is compatible with low to medium temperature emitters (underfloor heating, fan coil units, water cassettes, radiators, mixed installations, etc.). EREBA is also compatible with medium to high temperature emitters for boiler backup operation.

The EREBA heat pump is installed outside in an open area, ideally as close as possible to the boiler room.

Each device is tested in the factory and delivered ready for operation..

RANGE

EREBA's range is composed by 7 single-phase and three-phase reversible models.

Operation in cooling mode with an outdoor temperature of 0°C to 46°C.

Operation in heating mode with an outdoor temperature of -20°C to +30°C.

If the heat pump is the only source of heat:
Below this temperature, heating must be provided by a separate heating source or an additional electrical supply

If the heat pump is used for backup operation:
Operates down to the equilibrium point (temperature below which the heat pump can no longer keep up with heating needs). Below this point, the heat pump and boiler run alternately (heat pump OR boiler).

CONFORMITY

Low Voltage Directive 2006/95/EC

EMC : ElectroMagnetic Compatibility 2004/108/EC

PED : Pressure Equipment Directive 97/23/EC

WEEE : Waste Electrical & Electronic Equipment 2012/19/EU

RoHS : Restriction of Hazardous Substances Directive 2011/65/UE

The new reversible Ereba air-to-water heat pumps with built-in inverter technology were designed for residential and light commercial applications. They offer excellent energy efficiency values, exceptionally quiet operation and meet the most stringent operating temperature demands.



Ecodesign is the European Directive that sets mandatory requirements for Energy related Products (ErP) to improve their energy efficiency. CIAT supports initiatives to reduce the environmental impact of its products.

Features

- Wide operating range in both heating and cooling mode offering high performance in a wide temperature range.
- DC inverter twin-rotary compressors with Pulse Amplitude Modulation (PAM) and Pulse Width Modulation (PWM) for enhanced reliability, low energy consumption and smooth vibration-free operation under all operating conditions.
- Variable-speed fans with an innovative patented fan blade shape ensure improved air distribution at exceptionally low noise levels
- Pre-set or customised selection of the appropriate climate curve for stable output capacity to match the heat load.
- Output to link and integrate the unit with existing heat sources or a back-up heating source (single or dual-energy approach) for increased savings and optimum comfort all year round.
- Connection and control of an external dehumidifier through the programmable thermostat CS1 to monitor and regulate the relative humidity.
- Input and output connections to the three-way valve for connection to a domestic hot-water buffer-tank. Provides increased flexibility for any application.
- Leaving water temperature up to 60°C for radiator and domestic hot water applications.
- Plug-and-play control for failsafe serviceability.
- Alarm input to force the unit off for increased safety, and matching with external control systems or safety devices.
- Output to operate an additional water pump for increased installation flexibility.

Advanced performance

- Ereba have an extremely high energy efficiency ratio in both cooling and heating mode, ensuring significant energy savings. Large, efficient coils and optimised circuiting ensure that all combinations meet the European tax rebate efficiency targets. Efficiency at part load conditions (seasonal energy efficiency) reaches the highest level in the industry.
- Year-round comfort - the advanced technology used in Ereba heat pump condensing units provides optimised comfort levels for the end users, both in terms of water temperature control and quietness. The desired temperature is quickly reached and effectively maintained without fluctuations. Ereba offers optimised individual comfort levels - both in winter and in summer.
- Wide temperature operating range: Ereba can operate efficiently in extreme temperature conditions. Ereba can work at low-ambient conditions in cooling mode (down to 0°C and up to 46°C outside temperature). For end user comfort the units also operate down to -20°C outdoor temperature in heating mode, and in the summer season they produce hot water up to 60°C at up to 30°C outside temperature for domestic hot water applications.


The units integrate the latest technological innovations: **Non-ozone depleting refrigerant R410A**, DC inverter twin-rotary compressors, low-noise fan and microprocessor control.

With exceptional energy efficiency values the inverter mini-chillers qualify for local tax reductions and incentive plans in all EU countries.

Advanced technology

- Electronic system management: several sensors placed in key positions in the refrigerant circuit electronically detect the operational system status. Two micro-controllers receive the input from the sensors, manages them using advanced control algorithms and optimises the refrigerant flow and the functioning of all core components - the compressor, fan motors and the pulse modulation valve.
- The pulse modulation valve, a bi-flow electronic expansion device, optimises the refrigerant amount in the circuit and the superheat, preventing refrigerant migration back into the compressor. This device further enhances high system performance and reliability.
- The air management system, consisting of the propeller fan, orifice and air discharge grille guarantees minimised noise levels.

New patented fan blade shape and grille profile with low pressure drop

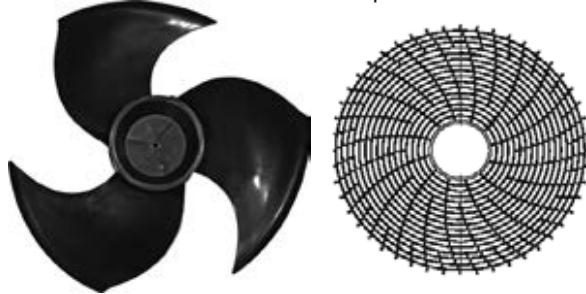

Environmental care


- Non-ozone depleting refrigerant R410A.
- Chlorine-free refrigerant of the HFC group with zero ozone depletion potential.
- High-density refrigerant, therefore less refrigerant required.
- Very efficient - gives an increased energy efficiency ratio (EER).
- The components of Ereba are free of any hazardous substances.
- The new packaging ensures high protection during transport and handling and is 100% recyclable.

Fast and simple installation and service

- Easy access to all internal components: simply undo three screws to remove the complete front panel to access the refrigerant piping connections, control box and electrical connections, as well as the compressor and other key parts.
- Advanced circuit design and component selection has resulted in a compact unit with an exceptionally small footprint that is easy to transport even through narrow doors.
- Reduced operating weight and a handle on the unit panels to facilitate transport.
- No additional buffer tank required, simplifying and speeding up the installation process.
- 3 bar pressure relief valve as standard.
- Two or three-litre internal expansion tank.
- High-temperature refrigerant protection.
- Water flow switch to ensure that the circuits contain enough water to operate correctly.
- Various power cable outlet options: pre-punched holes in the cabinet panels permit cable exit on the side, front or rear.
- Dealer service tool connection kit includes the software and connections to monitor the operating parameters from a personal computer, giving an easy-to-read display with visual graphs and statistics indicators.
- Ereba are equipped with 1 inch gas MPT water connections.
- The integrated hydronic module reduces space requirements and simplifies the installation. Only the power and the water supply and return piping need to be connected.
- Condensate drain piping connection to the unit includes a leak-proof pipe rubber joint.
- Specially shaped anchorage feet ensure correct and safe unit fixing to the foundation.
- The CS1 programmable thermostat periodically runs system checks to monitor and assess the unit operating parameters (standard parameters are 45°C LWT in heating and 7°C LWT in cooling. If a problem occurs, troubleshooting fault codes and messages help the service technician to identify the fault.

DC inverter twin-rotary compressor

- Advanced technology providing maximum energy-efficiency with high capacity available at peak conditions and optimised efficiency at low and mid compressor speeds. Ereba heat pump DC inverter uses Intelligent Power Drive Unit (IPDU) hybrid inverter technology, combining two electronic management logics: Pulse Amplitude Modulation (PAM) and Pulse Width Modulation (PWM) for optimised compressor operation in all conditions, minimised temperature fluctuations, and providing perfect individual comfort control with significantly reduced energy consumption:
 - PAM: pulse amplitude modulation of the direct current controls the compressor at maximum load conditions (start-up and peak load), increasing the voltage at fixed frequency. The compressor works at high speed to rapidly achieve the desired temperature.
 - PWM: pulse width modulation of the direct current controls the compressor at partial load conditions, adjusting the frequency at fixed voltage. The compressor speed is fine-tuned and the system provides high-level comfort (no temperature fluctuations) at exceptionally efficient working conditions.
- Compressor frequency is increased continuously up to the maximum level. This ensures that there are no current draw peaks in the start-up phase and safe connection to a single-phase power supply even in large-capacity systems. The maximum operating current of Ereba is below 7.2 A (systems up to 4 kW) and below 23 A for larger systems (12 kW). Inverter ramp-up speed makes soft starts unnecessary and ensures immediate maximum power.
- The two rotary compression cylinders, offset from each other by 180°, and the DC brushless motor with the shaft in perfect balance ensure reduced vibration and noise, even at very low operating speeds. This results in an extremely wide range between minimum and maximum capacity with continuous operation, guaranteeing that the system is always optimised and provides maximum comfort at exceptionally high efficiency levels.
- Twin-rotary cylinders, low vibrations and low load to the shaft ensure highest compressor reliability and a long trouble-free operating life.
- All DC brushless twin-rotary compressors are equipped with crankcase heaters as standard.
- A double compressor shield for acoustic insulation further reduces noise levels.

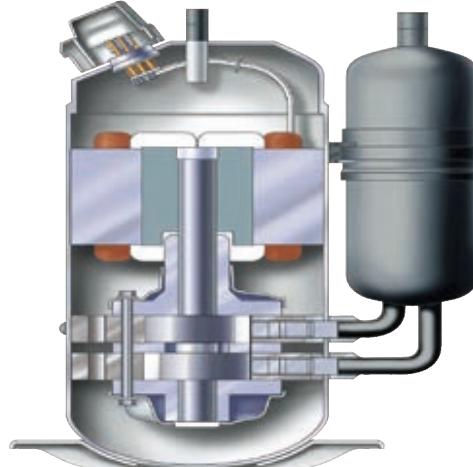

Superior reliability

- Exceptional endurance tests:
 - All the units are tested at various stages on the production line for circuit leakage, electrical compliance, water and refrigerant pressures.
 - End-of-line test of all unit operating parameters
 - Corrosion resistance test
 - Accelerated ageing test on critical components and complete assembled units, simulating thousands of hours of continuous operation.
 - Packaging crash test to ensure that the units are adequately protected against accidental shocks
 - Extensive field and site testing.

Corrosion-resistant casing



Economical operation

- Increased energy efficiency at part load:
 - The exceptionally high energy efficiency of Ereba is the result of a long qualification and optimisation process.
 - Use of ambient air as primary source of energy in domestic heating applications significantly reduces the overall energy consumption and minimises CO₂ emissions.
 - Night mode operation at reduced compressor speed, results in low-noise operation and a significant reduction in energy consumption.
 - Easy-to-set and economical silent mode, reduces the compressor speed.
 - R-410A refrigerant is easier to use than other refrigerant blends.

GMC board

- The new GMC controller is specifically developed for Ereba, and incorporates new control algorithms. It features customised or pre-defined climate curves, domestic hot water control, a night-time noise reduction function, a defrost/alarm output signal, an external heat source, a pump block prevention function, freeze protection and compressor operation management.

User interface

- Ereba can use the following user interfaces:
 - The CS1 programmable thermostat with easy-to-read LCD screen. It provides enhanced control capability for maximised performance, reliability and indoor comfort and has extended programming features such as weekly scheduling and dehumidifier/humidifier signals. The sleek contemporary design blends in with any room decor.
 - The Ereba remote controller



Programmable thermostat



→ Reversible air-to-water heat pump

PHYSICAL DATA

Ereba		4H	6H	8H	12H	15H	12HT	15HT
Cooling								
Full load performances*								
C1 Nominal capacity kW	C1	Nominal capacity kW	3.33	4.73	5.84	10.24	13.04	10.20
	C1	EER kW/kW	3.02	3.00	2.98	2.96	2.95	3.00
	C1	Eurovent class cooling	B	B	B	B	B	B
	C2 Nominal capacity kW	C2	4.93	7.04	7.84	13.54	16.04	13.50
	C2 EER kW/kW	C2	4.20	3.70	3.99	3.66	3.85	4.15
	C2 Eurovent class cooling	C2	A	B	A	B	A	A
Seasonal efficiency**	ESEER kW/kW		4.36	4.51	4.15	4.22	4.31	4.4
Heating								
Full load performances*								
H1 Nominal capacity kW	H1	Nominal capacity kW	4.1	5.8	7.2	11.9	14.46	12
	H1	COP kW/kW	4.06	4.2	3.91	3.91	4.09	4.3
	H2 Nominal capacity kW	H2	3.9	5.8	7.4	12.95	13.96	11.2
	H2 COP kW/kW	H2	3.2	3.01	3.16	3.01	3.23	3.35
	H3 Nominal capacity kW	H3	4.1	5.4	6.7	11.5	11.66	11.43
	H3 COP kW/kW	H3	2.72	2.58	2.3	2.48	2.82	3.12
Seasonal efficiency**								
H1 SCOP kW/kW	H1	SCOP kW/kW	3.73	3.6	3.03	3.19	3.61	3.78
	H1	η_s %	146	141	118	125	141	148
	H1	P _{rated} kW	3.83	4.92	4.56	10	10.75	9.76
	H1	Energy efficiency class	A+	A+	A	A+	A+	A+
	H3 SCOP kW/kW	H3	3.53	3.37	2.84	2.95	3.25	3.47
	H3 η_s %	H3	138	132	111	115	127	136
Sound levels								
Sound power level ^(*) (H3)	dB(A)		62	62	64	67	68	68
Sound power level ⁽¹⁾ (C1)	dB(A)		64	64	65	68	69	69
Dimension, H x L x D	mm	821 x 908 x 350	821 x 908 x 350	821 x 908 x 350	1363 x 908 x 350	1360 x 900 x 320	1360 x 900 x 320	1360 x 900 x 320
Operating weight ⁽³⁾	kg	57	61	69	104	112	116	116
Refrigerant					R410A			
Circuit charge ⁽³⁾	kg	1.195	1.35	1.81	2.45	3.385	2.45	3.385
	CO ₂ eq.	2.5	2.8	3.8	5.1	7.1	5.1	7.1
Compressors					DC Inverter Twin-Rotary			
Air heat exchangers					Copper tubes and aluminium fins			
Fans					Variable speed 3 blades fan			
Quantity		1	1	1	2	2	2	2
Pump					Variable speed circulator			
Expansion tank volume	l	2	2	2	3	3	3	3
Available static pressure (C1)	kPa	69	72	58	62	37	66	37
Available static pressure (H1)	kPa	60	60	56	70	58	70	55
Available static pressure (H2)	kPa	62	60	55	72	60	73	58
Min. system water content	l	14	21	28	42	49	42	49
Max. water-side operating pressure	kPa	300	300	300	300	300	300	300
Water connections								
Diameter	inch	1 M	1 M	1 M	1 M	1 M	1 M	1 M
Outside tube diameter	mm	25.4 M	25.4 M	25.4 M	25.4 M	25.4 M	25.4 M	25.4 M
Chassis paint colour					Beige			

* In accordance with standard EN14511-3:2013

** In accordance with standard EN14825:2013, average climate

C1 Cooling mode conditions: evaporator water entering/leaving temperature 12°C/7°C, outside air temperature 35°C, evaporator cooling factor 0 m² K/W

C2 Cooling mode conditions: evaporator water entering/leaving temperature 23°C/18°C, outside air temperature 35°C, evaporator cooling factor 0 m² K/W

H1 Heating mode conditions: Water heat exchanger water entering/leaving temperature 30°C/35°C, fouling factor 0 m² K/W. Outside air temperature 7°C db/6°C wb,

H2 Heating mode conditions: Water heat exchanger water entering/leaving temperature 40°C/45°C, fouling factor 0 m² K/W. Outside air temperature 7°C db/6°C wb,

H3 Heating mode conditions: Water heat exchanger water entering/leaving temperature 47°C/55°C, fouling factor 0 m² K/W. Outside air temperature 7°C db/6°C wb,

(1) In dB ref=10-12 W, (A) weighting. Declared dualnumber noise emission values in accordance with ISO 4871 (with an associated uncertainty of +/-3dB(A)).

Measured in accordance with ISO 9614-1.

(3) Weights are guideline only. Refer to the unit nameplate.



Eurovent certified values

Ereba

ELECTRICAL DATA

Ereba		4H	6H	8H	12H	15H	12HT	15HT
Power supply	V-ph-Hz	230-1-50	230-1-50	230-1-50	230-1-50	230-1-50	400-3N-50	400-3N-50
Voltage range	V	198-264	198-264	198-264	198-264	198-264	376-424	376-424
Full load current	A	9	11	14.5	20.7	22.6	11.1	11.1
Fuse rating	A	10	16	16	25	25	16	16
Main power cable section	mm ²	2.5	2.5	2.5	2.5	2.5	2.5	2.5


SOUND POWER LEVELS L_W

Cooling mode									
Ereba		Octave bands, Hz						Sound power levels	
		125	250	500	1000	2000	4000		
4H	dB	61	68	62	56	51	47	41	dB(A) 64
6H	dB	61	68	63	56	53	50	46	dB(A) 64
8H	dB	66	62	63	59	56	55	51	dB(A) 65
12H	dB	70	65	67	62	58	57	50	dB(A) 68
15H	dB	70	68	66	64	61	58	53	dB(A) 69
12HT	dB	70	68	66	64	61	58	53	dB(A) 69
15HT	dB	70	68	66	64	61	58	53	dB(A) 69
Heating mode									
Ereba		Octave bands, Hz						Sound power levels	
		125	250	500	1000	2000	4000		
4H	dB	67	62	61	56	50	47	43	dB(A) 62
6H	dB	62	64	62	55	50	58	43	dB(A) 62
8H	dB	66	65	63	57	54	52	45	dB(A) 64
12H	dB	70	66	66	61	57	54	46	dB(A) 67
15H	dB	72	68	67	63	59	56	50	dB(A) 68
12HT	dB	72	68	67	63	59	56	50	dB(A) 68
15HT	dB	72	68	67	63	59	56	50	dB(A) 68


OPERATING LIMITS

	Cooling mode	Heating mode
Maximum outside temperature	46 °C	30 °C
Maximum leaving water temperature	18 °C	60 °C
Minimum outside temperature	0 °C (Ereba 4H, 6H : 5°C)	-20 °C
Minimum leaving water temperature	4 °C	20 °C

Operating range, heating mode

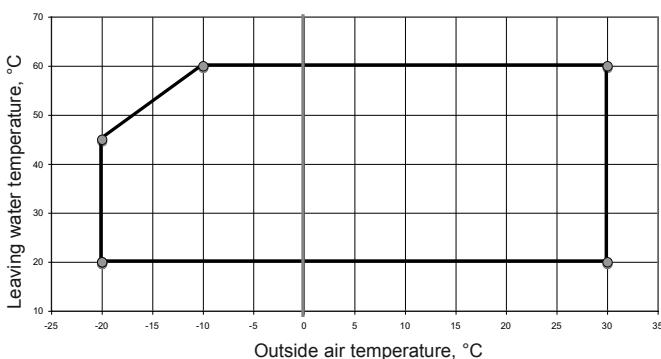


Operating range, cooling mode

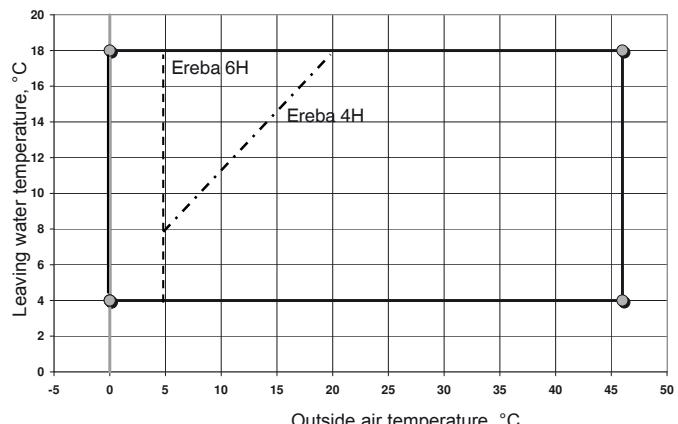


AVAILABLE STATIC PRESSURE


Ereba 4H

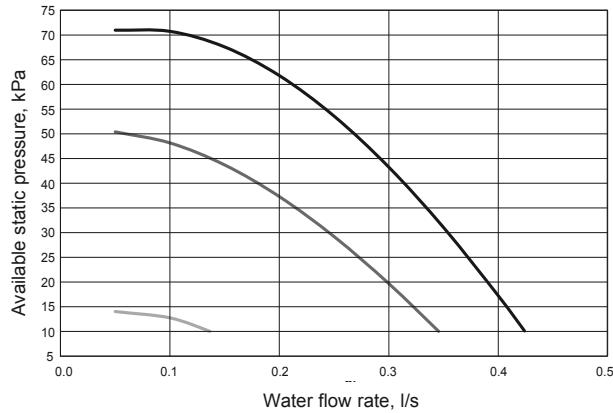


Ereba 6H

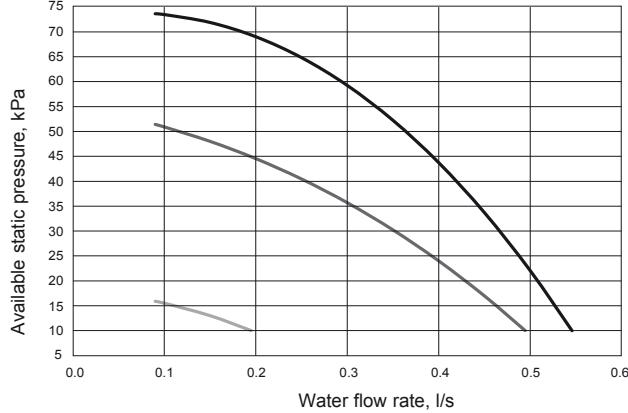

Ereba 8H

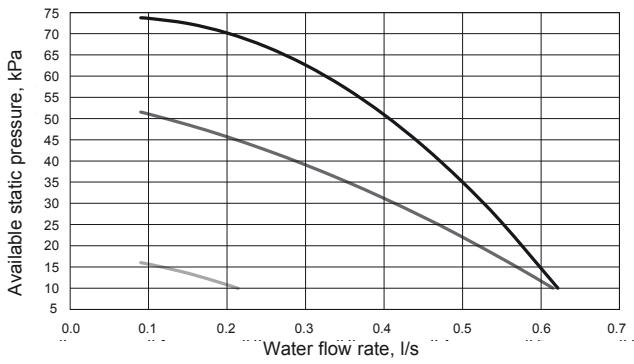

Ereba 12H(T), 15H(T)

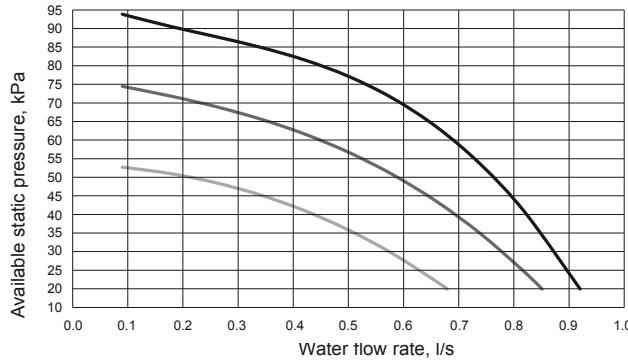


— High speed

— Medium speed


— Low speed

DIMENSIONS (MM)

4H, 6H, 8H

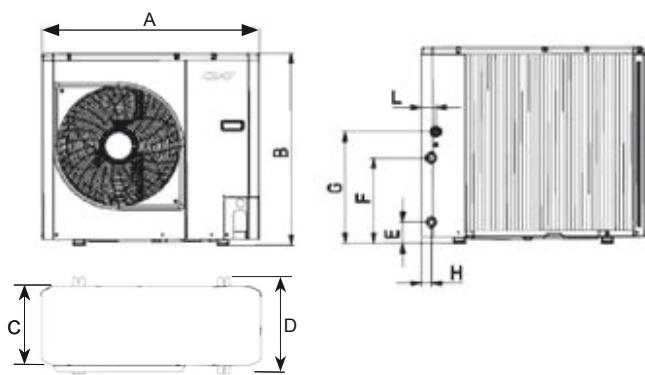


12H(T), 15H(T)

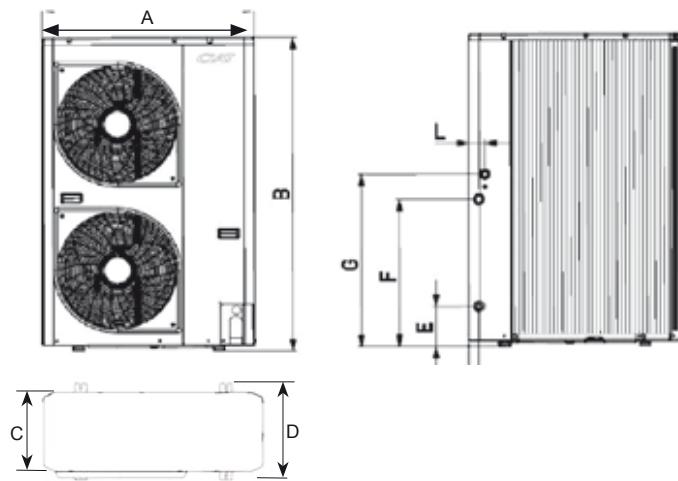

Ereba	A	B	C	D	E	F	G	H	L
4H	900	820	320	400	87	356	466	40	60
6H	900	820	320	400	87	356	466	40	60
8H	900	820	320	400	87	356	466	40	60
12H(T)	900	1360	320	400	174	640	750	44	69
15H(T)	900	1360	320	400	174	640	750	44	69

DRAIN HOSE AND BASE PAN KNOCKOUTS

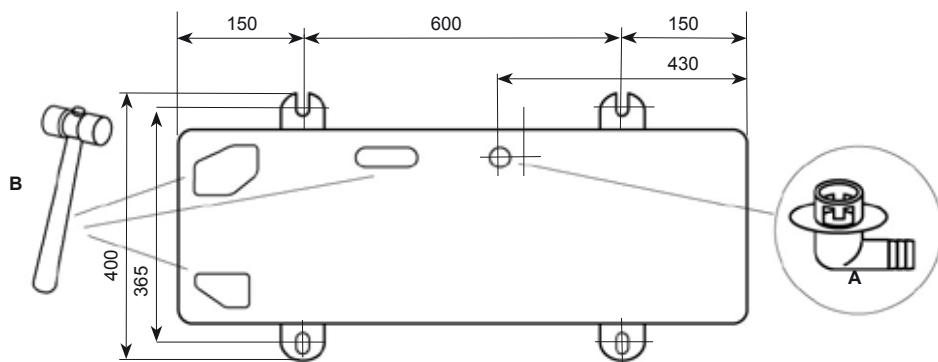


In case of draining through the drain pipe, attach the drain nipple (A) and use a drain hose with an inside diameter of 16 mm (to be provided). In cold outside temperatures when the drain pipe can freeze up, ensure that drainage is not obstructed.


Open the knockout holes in the base pan to improve the drainage capacity. Use a hammer (B) to open the knockout holes.

CLEARANCES (MM)

Single unit installation

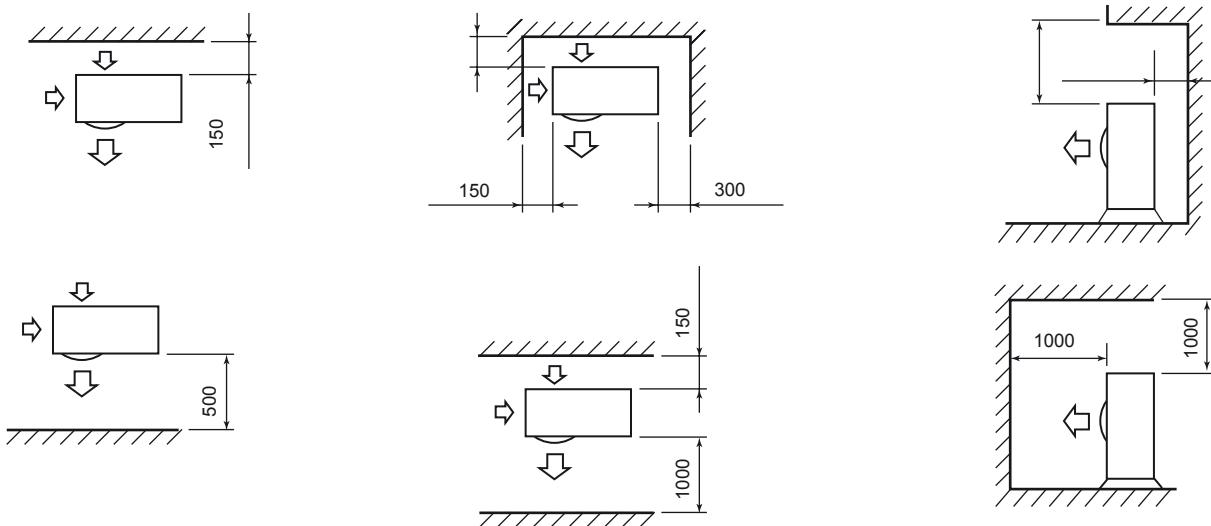

Multiple unit installation

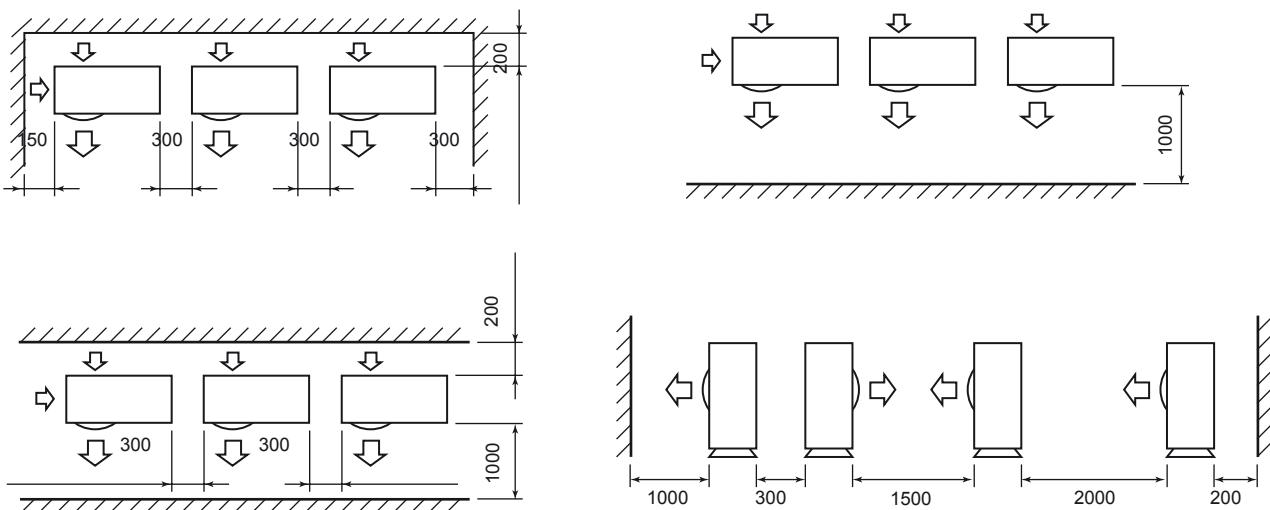

Note: The height of any obstacle at both the front and rear should be less than the outdoor unit height.



→ Reversible air-to-water heat pump

HEATING CAPACITIES IN ACCORDANCE WITH EN14511-3:2013

Ereba

LWT °C	Outside air dry-bulb (wet-bulb) temperature, °C																					
	-20 (-21)						-15 (-16)						-7 (-8)									
	Qh			COP		q	Qh			COP		q	Qh			COP		q				
	Nom	Min	Max	Nom	Min	kW/kW	Nom	Min	Max	Nom	Min	kW/kW	Nom	Min	Max	Nom	Min	kW/kW	I/s			
4H	35	1.22	0.45	1.22	1.16	1.80	1.16	0.058	2.35	0.49	2.67	2.00	2.20	1.90	0.112	2.50	0.52	2.80	2.40	2.55	2.30 0.119	
6H		3.00	0.45	3.11	2.06	2.10	2.00	0.143	3.20	0.60	3.26	2.31	2.47	2.21	0.153	3.44	0.64	3.50	2.51	2.69	2.40 0.164	
8H		1.76	0.56	1.76	2.46	2.50	2.46	0.084	3.20	0.73	3.70	2.47	2.64	2.00	0.153	3.76	0.78	4.20	2.63	2.81	2.10 0.180	
12H		3.22	1.50	3.22	2.08	2.10	2.08	0.154	6.44	1.95	7.28	2.28	2.31	2.26	0.308	6.94	2.10	7.40	2.52	2.56	2.50 0.332	
15H		4.45	1.26	4.45	1.78	1.84	1.78	0.213	7.42	1.63	8.30	2.36	2.42	2.33	0.355	7.80	1.76	9.10	2.50	2.57	2.47 0.382	
12HT		4.01	1.34	4.01	1.95	1.90	1.95	0.143	6.68	1.74	7.52	2.51	2.65	2.51	0.286	7.12	1.88	8.73	2.66	2.74	2.50 0.340	
15HT		4.45	1.36	4.45	1.78	1.88	1.78	0.177	7.42	1.76	8.35	2.45	2.47	2.45	0.355	8.00	1.90	9.46	2.60	2.62	2.40 0.382	
4H	45	1.18	0.40	1.18	1.07	1.75	1.07	0.056	2.28	0.44	2.56	1.85	2.10	1.80	0.109	2.40	0.49	2.60	2.15	2.38	2.00 0.115	
6H		1.44	0.44	1.44	1.82	2.02	1.82	0.069	3.20	0.59	3.24	2.13	2.31	2.03	0.153	3.45	0.64	3.50	2.20	2.39	2.11 0.165	
8H		1.27	0.57	1.27	2.00	1.96	2.00	0.061	3.35	0.71	3.60	2.11	2.26	1.65	0.160	3.85	0.76	4.00	2.23	2.45	1.70 0.184	
12H		3.02	1.23	3.02	1.96	2.00	1.96	0.144	6.04	1.83	6.82	2.10	2.14	2.08	0.288	6.63	2.01	7.50	2.19	2.23	2.17 0.317	
15H		3.00	1.28	3.00	1.70	1.73	1.70	0.143	7.05	1.55	7.98	2.08	2.14	2.06	0.358	7.65	1.76	9.10	2.20	2.26	2.17 0.382	
12HT		3.00	1.39	3.00	1.72	1.74	1.72	0.133	6.35	1.75	7.23	1.82	2.16	1.82	0.140	5.87	1.77	8.72	2.26	2.28	2.20 0.281	
15HT		3.00	1.38	3.00	1.70	1.73	1.70	0.133	7.05	1.62	8.03	1.80	2.14	1.80	0.191	8.00	1.76	9.44	2.26	2.26	2.13 0.382	
4H	55																2.44	0.44	2.49	1.78	1.91	1.77 0.117
6H																	3.28	0.61	3.33	1.90	2.06	1.85 0.157
8H																	3.60	0.74	3.96	1.86	2.09	1.65 0.172
12H																	6.37	1.93	7.20	1.80	1.83	1.78 0.304
15H																	7.35	1.65	7.94	1.85	1.90	1.74 0.358
12HT																	5.79	1.67	6.97	1.86	1.92	1.84 0.277
15HT																	6.49	1.65	7.94	1.88	1.90	1.76 0.31
4H	60																2.23	0.40	2.45	1.75	1.87	1.72 0.107
6H																	3.01	0.56	3.06	1.69	1.80	1.62 0.144
8H																	1.83	0.65	2.22	1.57	1.58	1.55 0.087
12H																	6.12	1.85	6.92	1.56	1.59	1.55 0.293
15H																	6.57	1.51	7.57	1.64	1.67	1.61 0.314
12HT																	5.41	1.53	6.73	1.56	1.57	1.52 0.258
15HT																	6.66	1.51	7.54	1.51	1.55	1.42 0.318

LWT °C	Outside air dry-bulb (wet-bulb) temperature, °C																				
	-3(-4)						0 (-1)						2 (1)								
	Qh			COP		q	Qh			COP		q	Qh			COP		q			
	Nom	Min	Max	Nom	Min	kW/kW	Nom	Min	Max	Nom	Min	kW/kW	Nom	Min	Max	Nom	Min	kW/kW	I/s		
4H	35	2.80	0.57	3.13	2.60	2.82	2.80	0.134	2.90	0.61	3.33	2.90	3.02	3.00	0.139	3.25	0.64	3.60	3.00	3.12	3.15 0.155
6H		3.75	0.70	3.82	2.77	2.97	2.65	0.179	3.99	0.74	4.06	2.97	3.18	2.84	0.191	4.20	0.78	4.27	3.07	3.29	2.94 0.201
8H		4.36	0.88	4.83	2.81	3.04	2.38	0.208	4.74	0.96	5.24	2.94	3.21	2.54	0.226	5.12	1.01	5.52	2.99	3.27	2.64 0.245
12H		7.83	2.37	8.85	2.85	2.90	2.83	0.374	8.50	2.57	9.61	3.00	3.05	2.97	0.406	8.75	2.87	10.11	3.11	3.16	3.08 0.418
15H		8.98	1.97	10.21	2.81	2.88	2.78	0.429	8.99	2.13	11.05	3.04	3.12	3.00	0.464	9.50	2.45	12.07	3.10	3.28	3.16 0.487
12HT		7.68	2.11	9.51	2.82	2.97	2.72	0.367	7.85	2.28	9.92	2.84	3.11	2.74	0.375	8.55	2.62	11.02	3.17	3.28	3.08 0.409
15HT		8.49	2.13	10.54	2.75	2.94	2.69	0.406	8.69	2.30	11.15	2.77	3.08	2.70	0.415	9.50	2.65	12.55	3.10	3.24	3.07 0.454
4H	45	2.70	0.52	3.03	2.40	2.55	2.36	0.129	2.80	0.55	3.23	2.52	2.68	2.50	0.134	3.00	0.60	3.40	2.64	2.87	2.60 0.143
6H		3.76	0.69	3.80	2.31	2.51	2.21	0.180	4.00	0.72	4.02	2.39	2.59	2.29	0.191	4.20	0.79	4.22	2.51	2.78	2.40 0.201
8H		4.45	0.87	4.78	2.34	2.51	1.85	0.212	4.81	0.95	5.20	2.42	2.55	2.01	0.230	5.15	0.99	5.48	2.55	2.69	2.11 0.246
12H		7.43	2.25	8.40	2.31	2.34	2.29	0.355	8.06	2.44	9.12	2.42	2.46	2.40	0.385	8.48	2.74	9.59	2.61	2.67	2.57 0.405
15H		8.98	1.97	10.21	2.34	2.40	2.31	0.429	9.71	2.13	11.05	2.44	2.51	2.42	0.464	9.50	2.47	11.43	2.60	2.71	2.56 0.487
12HT		6.23	1.99	9.44	2.39	2.43	2.33	0.298	6.68	2.15	9.83	2.49	2.53	2.43	0.319	7.50	2.49	10.59	2.70	2.74	2.58 0.358
15HT		8.40	1.97	10.48	2.39	2.40	2.27	0.401	8.61	2.13	11.04	2.49	2.51	2.37	0.412	9.30	2.47	11.88	2.65	2.71	2.51 0.444
4H	55	2.77	0.48	2.83	1.92	2.04	1.89	0.132	2.99	0.50	3.05	2.01	2.14	1.98	0.143	3.15	0.56	3.21	2.13	2.27	2.11 0.15
6H		3.70	0.67	3.75	2.04	2.20	1.97	0.177	3.97	0.70	4.00	2.14	2.31	2.07	0.19	4.19	0.78	4.19	2.26	2.44	2.20 0.2
8H		4.23	0.84	4.59	1.97	2.19	1.76	0.202	4.50	0.91	4.98	2.08	2.35	1.85	0.215	4.86	0.96	5.24	2.20	2.40	2.00 0.232
12H		7.44	2.25	8.41	1.98	2.01	1.96	0.355	8.23	2.45	9.13	2.08	2.11	2.06	0.393	8.66	2.71	9.61	2.20	2.23	2.18 0.414
15H		7.99																			



→ Reversible air-to-water heat pump

Ereba

HEATING CAPACITIES IN ACCORDANCE WITH EN14511-3:2013

Ereba

		Outside air dry-bulb (wet-bulb) temperature, °C																				
LWT °C		7(6)						10 (9)						20 (19)								
		Qh			COP			q	Qh			COP			q	Qh			COP			
		kW			kW/kW			l/s	kW			kW/kW			l/s	kW			kW/kW		l/s	
Nom	Min	Max	Nom	Min	Max	Nom		Nom	Min	Max	Nom	Min	Max	Nom	Nom	Min	Max	Nom	Min	Max	Nom	
4H	35	4.07	0.77	4.73	4.15	4.10	3.97	0.196	4.45	0.83	5.14	4.47	4.50	4.38	0.213	5.62	1.05	6.49	5.45	5.59	5.20	0.269
6H		5.76	1.08	6.14	4.28	4.49	3.97	0.277	6.32	1.18	6.67	4.63	4.96	4.38	0.302	7.98	1.49	8.42	6.07	6.49	5.73	0.381
8H		7.16	1.34	8.00	3.97	4.17	3.44	0.344	7.82	1.46	8.69	4.26	4.56	3.76	0.373	9.87	1.84	10.97	5.46	5.84	4.81	0.472
12H		11.86	3.61	13.45	3.95	3.96	3.86	0.569	12.92	3.91	14.61	4.30	4.37	4.26	0.617	16.32	4.94	18.45	5.63	5.72	5.58	0.780
15H		14.46	3.18	16.25	4.09	4.17	4.01	0.693	15.74	3.46	17.47	4.48	4.59	4.42	0.752	19.89	4.37	21.65	5.87	6.02	5.80	0.950
12HT		12.00	3.40	15.00	4.30	4.39	4.20	0.573	12.86	3.70	16.13	4.68	4.73	4.57	0.614	16.14	4.67	20.24	6.03	6.20	5.89	0.771
15HT		15.00	3.44	17.41	4.20	4.25	4.18	0.717	16.13	3.73	18.73	4.57	4.69	4.55	0.771	20.24	4.72	23.49	5.89	6.14	5.86	0.967
4H	45	3.87	0.70	4.50	3.26	3.40	3.15	0.186	4.19	0.78	4.84	3.39	3.60	3.33	0.200	5.17	1.00	5.97	4.02	4.27	3.95	0.247
6H		5.76	1.06	6.04	3.05	3.24	2.91	0.277	6.24	1.14	6.49	3.18	3.43	3.08	0.298	7.70	1.41	8.20	3.77	4.07	3.66	0.368
8H		7.36	1.32	7.92	3.19	3.45	2.84	0.354	8.03	1.44	8.57	3.44	3.74	3.08	0.384	10.02	1.82	10.75	4.34	4.73	3.89	0.479
12H		12.91	3.47	12.95	3.03	3.08	3.01	0.547	12.31	3.73	13.92	3.21	3.26	3.18	0.588	15.18	4.60	17.16	3.80	3.86	3.77	0.725
15H		13.96	3.07	15.92	3.23	3.29	3.17	0.669	15.05	3.30	17.12	3.40	3.49	3.36	0.719	18.55	4.07	20.35	4.03	4.14	3.99	0.886
12HT		11.20	3.10	14.50	3.35	3.33	3.30	0.535	11.97	3.34	15.90	3.40	3.52	3.40	0.572	15.03	4.11	18.92	3.85	4.18	4.03	0.718
15HT		14.50	3.07	16.52	3.30	3.29	3.21	0.693	15.90	3.30	18.11	3.40	3.49	3.31	0.760	18.92	4.07	21.55	4.03	4.14	3.92	0.904
4H	55	4.10	0.65	4.22	2.71	2.75	2.60	0.196	4.41	0.72	4.52	2.90	2.95	2.84	0.211	5.41	0.95	5.55	3.44	3.50	3.39	0.258
6H		5.40	1.02	5.58	2.58	2.78	2.53	0.258	5.98	1.10	6.10	2.72	2.93	2.70	0.286	6.87	1.35	7.05	3.23	3.43	3.18	0.328
8H		6.70	1.25	7.46	2.30	2.50	2.12	0.32	7.25	1.35	8.05	2.87	3.07	2.68	0.346	9.05	1.68	10.05	3.49	3.73	3.20	0.432
12H		10.27	3.36	11.50	2.50	2.54	2.48	0.49	11.46	3.61	12.35	2.63	2.68	2.63	0.547	13.85	4.42	14.60	3.08	3.13	3.08	0.662
15H		11.66	2.78	12.35	2.82	2.87	2.63	0.575	12.70	2.98	13.41	2.97	3.04	2.78	0.607	15.02	3.66	15.76	3.52	3.61	3.31	0.718
12HT		11.05	2.81	13.09	2.80	2.90	2.78	0.528	11.88	3.01	14.32	3.02	3.07	2.95	0.568	14.91	3.69	17.13	3.56	3.64	3.50	0.712
15HT		12.00	2.78	15.26	2.85	2.87	2.65	0.573	13.07	2.98	16.81	3.02	3.04	2.80	0.624	15.68	3.66	20.02	3.58	3.61	3.33	0.749
4H	60	3.83	0.61	4.18	2.48	2.70	2.45	0.183	4.07	0.68	4.44	2.61	2.90	2.58	0.195	4.94	0.91	5.44	3.07	3.45	3.04	0.236
6H		5.00	0.93	5.07	2.25	2.41	2.23	0.239	5.32	0.99	5.32	2.37	2.53	2.37	0.254	6.07	1.19	6.07	2.79	2.96	2.79	0.29
8H		3.04	1.08	3.70	2.12	2.14	2.10	0.145	3.25	1.15	3.95	2.26	2.28	2.24	0.155	3.95	1.41	4.81	2.71	2.74	2.69	0.189
12H		10.19	3.09	11.00	2.09	2.12	2.08	0.487	10.84	3.28	11.25	2.20	2.23	2.20	0.518	11.10	3.95	11.60	2.56	2.60	2.56	0.53
15H		10.03	2.52	11.24	2.20	2.23	2.10	0.479	11.25	2.59	11.25	2.30	2.33	2.30	0.537	11.90	3.12	11.90	2.48	2.72	2.48	0.568
12HT		10.65	2.54	12.93	2.69	2.70	2.63	0.509	11.58	2.62	13.83	2.81	2.87	2.78	0.553	14.21	3.15	16.36	3.37	3.42	3.32	0.679
15HT		12.80	2.52	14.50	2.60	2.68	2.54	0.612	13.69	2.59	15.97	2.75	2.84	2.69	0.654	16.03	3.12	19.02	3.29	3.39	3.21	0.766

Legend

LWT Leaving Water Temperature, °C
 Qh Heating Capacity, kW
 Nom Nominal
 Min Minimum
 Max Maximum
 COP Coefficient of Performance
 q Condenser water flow rate, l/s

Application Data

Standard units, refrigerant: R-410A
 Condenser entering/leaving water temperature difference: 5 K
 Condenser fluid: water
 Fouling Factor: 0. m² K/W

Performance in accordance with EN 14511-3: 2013



→ Reversible air-to-water heat pump

Cooling Capacities in accordance with EN14511-3:2013

Ereba

LWT °C	Outside air Temperature, °C																							
	5						15						25											
	Qc			EER			q			Qc			EER			q			Qc					
	kW		kW/kW		l/s		kW		kW/kW		l/s		kW		kW/kW		l/s		kW		kW/kW		l/s	
Nom	Min	Max	Nom	Min	Max	Nom	Nom	Min	Max	Nom	Min	Max	Nom	Min	Max	Nom	Min	Max	Nom	Min	Max	Nom		
4H	5	1.29	1.17	1.29	8.31	9.24	8.31	0.062	1.16	1.05	1.16	7.21	8.01	7.21	0.055	3.50	0.93	3.50	3.55	5.99	3.55	0.167		
6H		1.14	1.04	1.14	9.36	10.40	9.36	0.054	1.00	0.91	1.00	8.22	9.13	8.22	0.048	5.16	0.79	5.16	3.66	7.45	3.66	0.247		
8H		6.16	0.57	7.31	8.68	9.67	8.12	0.294	5.60	0.52	6.66	5.71	6.95	5.53	0.268	5.05	0.47	6.00	3.97	4.75	3.85	0.241		
12H		14.66	4.62	16.97	5.94	8.65	4.81	0.701	11.83	4.26	13.36	4.94	5.82	4.49	0.565	10.81	3.89	12.21	3.69	4.25	3.41	0.516		
15H		19.14	4.54	20.01	5.13	8.94	4.75	0.914	15.33	4.18	15.70	4.69	6.01	4.69	0.732	14.01	3.82	14.34	3.58	4.42	3.56	0.669		
12HT		13.79	4.45	19.71	5.96	8.76	4.42	0.659	11.37	4.10	15.86	5.19	5.89	4.59	0.543	10.41	3.74	14.49	3.72	4.33	3.48	0.497		
15HT		19.14	4.54	20.01	5.13	8.94	4.75	0.914	15.33	4.18	15.70	4.69	6.01	4.69	0.732	14.01	3.82	14.34	3.58	4.42	3.56	0.669		
4H	7	1.43	1.30	1.43	9.20	10.22	9.20	0.068	1.28	1.16	1.28	7.90	8.78	7.90	0.061	3.82	1.03	3.82	3.88	6.55	3.88	0.182		
6H		1.26	1.15	1.26	10.14	11.27	10.14	0.06	1.11	1.01	1.11	8.91	9.90	8.91	0.053	5.61	0.88	5.61	3.88	7.93	3.88	0.268		
8H		6.86	0.69	7.95	9.01	10.78	8.47	0.328	6.25	0.63	7.24	6.10	7.80	5.89	0.299	5.63	0.56	6.53	4.23	5.40	4.08	0.269		
12H		13.62	5.12	15.57	7.64	9.94	6.69	0.651	12.57	4.72	14.37	5.24	6.81	4.59	0.6	11.47	4.31	13.12	3.88	4.74	3.51	0.548		
15H		17.37	5.02	18.11	7.43	10.65	7.10	0.83	16.01	4.62	16.69	5.09	7.30	4.87	0.765	14.62	4.22	15.24	3.85	5.07	3.72	0.698		
12HT		12.82	4.92	17.83	8.07	10.44	6.76	0.613	12.12	4.53	16.86	5.69	7.15	4.77	0.579	11.14	4.14	15.39	4.03	4.97	3.65	0.532		
15HT		17.37	5.02	18.11	7.43	10.65	7.10	0.83	16.01	4.62	16.69	5.09	7.30	4.87	0.765	14.62	4.22	15.24	3.85	5.07	3.72	0.698		
4H	10								1.47	1.33	1.47	8.94	9.93	8.94	0.07	4.29	1.19	4.29	4.36	7.39	4.36	0.205		
6H		1.44	1.31	1.44	11.32	12.57	11.32	0.069	1.28	1.16	1.28	9.95	11.05	9.95	0.061	6.29	1.01	6.29	4.19	8.65	4.19	0.3		
8H		7.92	0.86	8.91	9.52	12.45	8.99	0.378	7.22	0.78	8.12	6.68	9.07	6.43	0.345	6.51	0.71	7.33	4.61	6.39	4.44	0.311		
12H		12.05	5.86	13.47	10.21	11.87	9.51	0.576	13.67	5.41	15.89	5.69	8.29	4.73	0.653	12.46	4.94	14.48	4.17	5.48	3.65	0.596		
15H		14.72	5.73	15.25	10.87	13.22	10.64	0.703	17.04	5.29	18.19	5.69	9.24	5.14	0.814	15.54	4.82	16.58	4.25	6.05	3.97	0.742		
12HT		11.37	5.62	15.01	11.23	12.95	10.28	0.543	13.25	5.18	18.36	6.44	9.05	5.03	0.633	12.23	4.73	16.74	4.50	5.93	3.89	0.584		
15HT		14.72	5.73	15.25	10.87	13.22	10.64	0.703	17.04	5.29	18.18	5.69	9.24	5.14	0.814	15.54	4.82	16.58	4.25	6.05	3.97	0.742		
4H	15																	5.09	1.44	5.09	5.17	8.79	5.17	0.243
6H		1.59	1.59	1.59	14.75	14.75	14.75	0.076	1.56	1.42	1.56	11.68	12.97	11.68	0.074	7.41	1.24	7.41	4.72	9.86	4.72	0.354		
8H		9.68	1.14	10.51	10.35	15.23	9.85	0.462	8.83	1.04	9.59	7.66	11.19	7.33	0.422	7.98	0.94	8.66	5.24	8.04	5.02	0.381		
12H		7.11	7.11	7.11	15.10	15.10	15.10	0.34	15.52	6.57	18.41	6.44	10.75	4.98	0.741	14.12	5.98	16.76	4.66	6.70	3.90	0.675		
15H		6.93	6.93	6.93	17.50	17.50	17.50	0.331	18.75	6.40	20.67	6.70	12.47	5.59	0.896	17.06	5.83	18.82	4.93	7.69	4.38	0.815		
12HT		6.79	6.79	6.79	17.15	17.15	17.15	0.324	15.14	6.27	20.87	7.68	12.22	5.47	0.723	14.05	5.71	19.00	5.28	7.53	4.29	0.671		
15HT		6.93	6.93	6.93	17.50	17.50	17.50	0.331	18.75	6.40	20.67	6.70	12.47	5.59	0.896	17.06	5.83	18.82	4.93	7.69	4.38	0.815		
4H	18																	5.56	1.59	5.56	5.65	9.62	5.65	0.266
6H		1.75	1.75	1.75	16.06	16.06	16.06	0.084	1.72	1.57	1.72	12.71	14.13	12.71	0.082	8.08	1.38	8.08	5.04	10.58	5.04	0.386		
8H		10.73	1.31	11.46	10.86	16.89	10.37	0.513	9.80	1.20	10.47	8.24	12.46	7.87	0.468	8.86	1.08	9.46	5.62	9.02	5.37	0.423		
12H		7.86	7.86	7.86	17.04	17.04	17.04	0.375	16.62	7.26	19.92	6.89	12.23	5.12	0.794	15.12	6.61	18.12	4.94	7.43	4.04	0.722		
15H		7.65	7.65	7.65	20.06	20.06	20.06	0.365	19.77	7.07	22.16	7.31	14.41	5.86	0.945	17.98	6.43	20.16	5.33	8.67	4.62	0.859		
12HT		7.49	7.49	7.49	19.66	19.66	19.66	0.358	16.26	6.93	22.37	8.43	14.12	5.73	0.777	15.15	6.30	20.36	5.75	8.50	4.53	0.724		
15HT		7.65	7.65	7.65	20.06	20.06	20.06	0.365	19.77	7.07	22.16	7.31	14.41	5.86	0.945	17.98	6.43	20.16	5.33	8.67	4.62	0.859		

Legend

LWT Leaving Water Temperature, °C
 Qc Cooling Capacity, kW
 Nom Nominal
 Min Minimum
 Max Maximum
 EER Energy Efficiency Ratio, kW/kW
 q Condenser water flow rate, l/s

Application Data

Standard units, refrigerant: R-410A
 Condenser entering/leaving water temperature difference: 5 K
 Condenser fluid: water
 Fouling Factor: 0. m² K/W

Performance in accordance with EN 14511-3: 2013

Ereba



→ Reversible air-to-water heat pump

Ereba

COOLING CAPACITIES IN ACCORDANCE WITH EN14511-3:2013

Ereba

LWT °C	Outside air Temperature, °C														
	35						45								
	Qc			EER			q l/s	Qc			EER			q l/s	
	kW		kW/kW		Nom			kW		kW/kW		Nom			
Nom	Min	Max	Nom	Min	Max	Nom	Min	Max	Nom	Min	Max	Nom	Min	Max	
4H	5	3.01	0.80	3.13	2.70	4.56	2.66	0.144	2.67	0.66	2.81	2.09	3.45	2.00	0.127
6H		4.28	0.65	4.94	2.78	5.66	2.53	0.205	3.78	0.51	4.36	2.11	4.28	1.92	0.18
8H		4.50	0.42	5.32	2.84	3.41	2.74	0.215	3.91	0.36	4.63	2.03	2.44	1.96	0.187
12H		9.60	3.46	10.85	2.78	3.16	2.56	0.459	8.38	2.95	9.49	2.02	2.31	1.89	0.401
15H		12.45	3.40	12.87	2.75	3.29	2.68	0.595	9.24	2.90	9.45	2.20	2.41	2.16	0.441
12HT		9.60	3.33	13.00	2.79	3.22	2.63	0.459	8.88	2.84	9.55	2.38	2.36	2.12	0.424
15HT		12.45	3.40	12.87	2.75	3.29	2.68	0.595	9.24	2.90	9.45	2.20	2.41	2.16	0.441
4H	7	3.33	0.89	3.45	3.02	4.92	2.84	0.158	2.91	0.75	3.05	2.23	3.70	2.16	0.139
6H		4.73	0.73	5.33	3.00	5.96	2.66	0.225	4.15	0.59	4.69	2.21	4.47	2.05	0.198
8H		5.84	0.50	5.80	2.98	3.85	2.91	0.239	4.37	0.44	5.06	2.17	2.77	2.09	0.209
12H		10.24	3.83	11.67	2.96	3.43	2.66	0.487	8.68	3.26	9.93	2.14	2.48	1.98	0.415
15H		13.04	3.75	13.55	2.95	3.67	2.83	0.621	9.82	3.20	10.09	2.30	2.64	2.27	0.469
12HT		10.20	3.68	13.69	3.00	3.59	2.77	0.487	9.33	3.13	10.19	2.56	2.59	2.22	0.446
15HT		13.00	3.75	13.55	2.91	3.67	2.83	0.621	9.82	3.20	10.09	2.30	2.64	2.27	0.469
4H	10	3.74	1.03	3.93	3.22	5.46	3.12	0.179	3.28	0.87	3.41	2.45	4.06	2.40	0.157
6H		5.33	0.86	5.92	3.10	6.40	2.85	0.255	4.71	0.70	5.18	2.35	4.76	2.24	0.225
8H		5.77	0.63	6.52	3.25	4.50	3.15	0.276	5.04	0.55	5.70	2.37	3.28	2.29	0.241
12H		11.10	4.39	12.88	3.10	3.85	2.81	0.53	9.14	3.73	10.59	2.31	2.73	2.11	0.437
15H		13.82	4.29	14.58	3.16	4.23	3.04	0.66	10.70	3.65	11.04	2.45	3.00	2.43	0.511
12HT		11.10	4.20	14.72	3.31	4.15	2.98	0.53	10.00	3.57	11.15	2.84	2.94	2.38	0.478
15HT		13.82	4.29	14.58	3.16	4.23	3.04	0.66	10.70	3.65	11.04	2.45	3.00	2.43	0.511
4H	15	4.46	1.26	4.73	3.74	6.36	3.59	0.213	3.88	1.08	4.00	2.82	4.67	2.80	0.186
6H		6.37	1.07	6.90	3.42	7.14	3.16	0.304	5.64	0.89	6.01	2.60	5.25	2.55	0.27
8H		7.04	0.84	7.72	3.66	5.58	3.56	0.336	6.17	0.74	6.77	2.70	4.12	2.62	0.295
12H		12.60	5.32	14.91	3.42	4.53	3.06	0.602	9.89	4.52	11.69	2.59	3.15	2.32	0.473
15H		15.18	5.18	16.28	3.56	5.18	3.39	0.725	12.16	4.40	12.62	2.70	3.59	2.70	0.581
12HT		12.60	5.08	16.45	3.84	5.08	3.32	0.602	11.12	4.31	12.75	3.30	3.52	2.64	0.531
15HT		15.18	5.18	16.28	3.56	5.18	3.39	0.725	12.16	4.40	12.62	2.70	3.59	2.70	0.581
4H	18	4.93	1.40	5.22	4.20	6.89	3.86	0.234	4.25	1.20	4.36	3.03	5.04	3.03	0.203
6H		7.04	1.20	7.49	3.70	7.58	3.35	0.334	6.20	1.00	6.50	2.74	5.54	2.74	0.296
8H		7.84	0.97	8.44	3.99	6.24	3.80	0.373	0.85	0.85	0.85	4.62	4.62	4.62	0.041
12H		13.54	5.88	16.12	3.66	4.95	3.21	0.645	10.34	4.99	12.35	2.76	3.40	2.45	0.494
15H		16.04	5.72	17.31	3.85	5.75	3.60	0.764	13.03	4.85	13.57	2.86	3.94	2.86	0.623
12HT		13.50	5.60	17.48	4.15	5.63	3.53	0.645	11.80	4.75	13.70	3.58	3.86	2.80	0.564
15HT		16.00	5.72	17.31	3.81	5.75	3.60	0.764	13.03	4.85	13.57	2.86	3.94	2.86	0.623

Legend

LWT	Leaving Water Temperature,oC
Qc	Cooling Capacity, kW
Nom	Nominal
Min	Minimum
Max	Maximum
EER	Energy Efficiency Ratio, kW/kW
q	Condenser water flow rate, l/s

Application Data


Standard units, refrigerant: R-410A
Condenser entering/leaving water temperature difference: 5 K
Condenser fluid: water
Fouling Factor: 0.m² K/W

Performance in accordance with EN 14511-3: 2013


HYDRONIC MODULE

The hydronic module reduces the installation time. The unit is factory-equipped with the main hydronic components required for the installation: **variable speed circulator**, expansion tank and **safey valve**.

The water heat exchanger and the hydronic module are protected against frost down to -10 °C, using pump cycling.

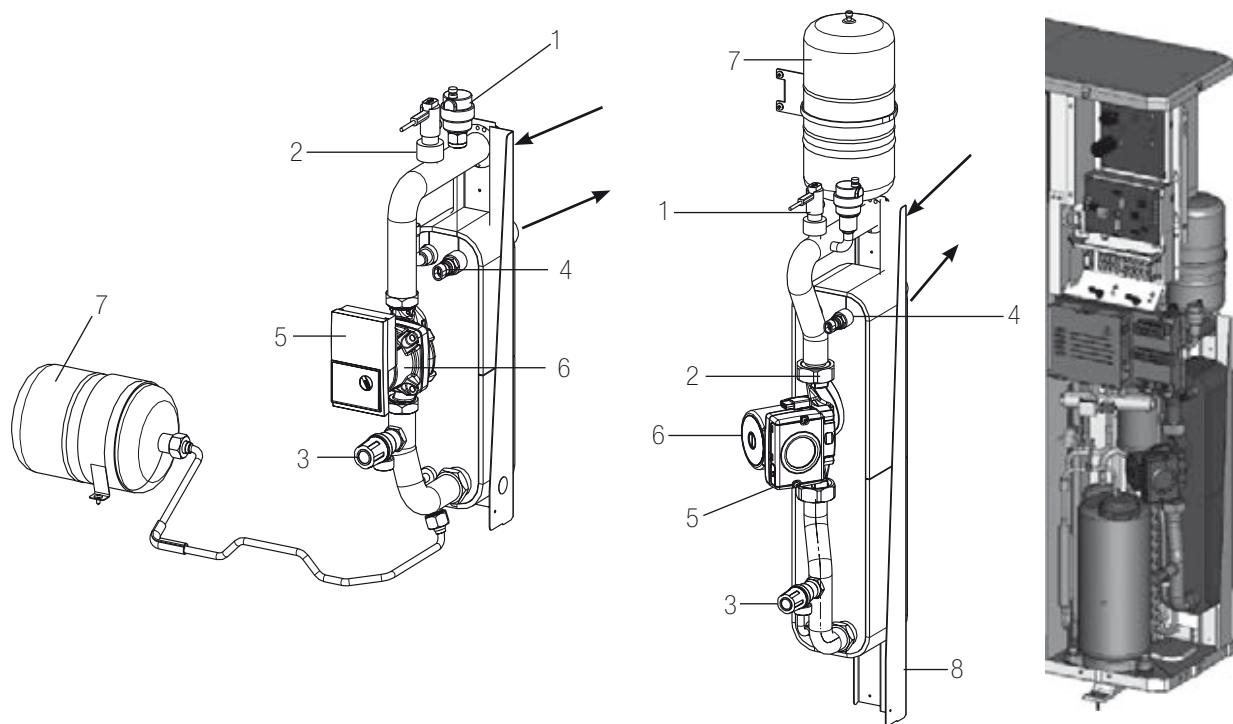

Schematic installation diagram

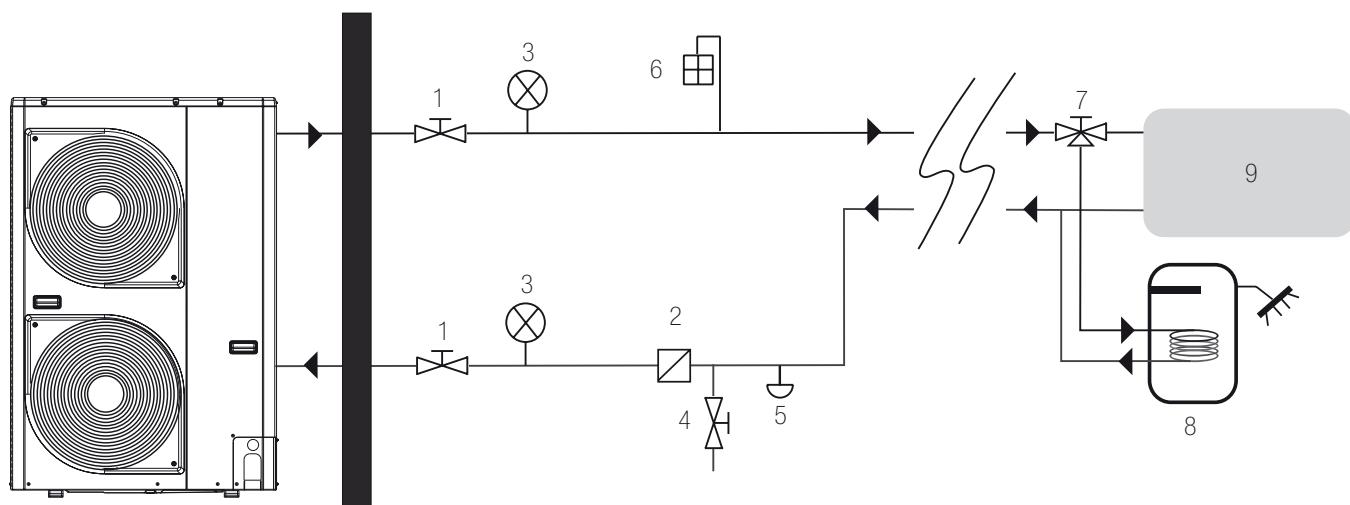

Legend

- | | |
|---|---|
| 1 | Ball valve |
| 2 | Water filter |
| 3 | Pressure gauge |
| 4 | Charge valve |
| 5 | Drain valve (located at the lowest water circuit point) |
| 6 | Purge valve (located at the highest water circuit point) |
| 7 | Three-way valve |
| 8 | Domestic hot water tank |
| 9 | Terminals (fan coil units, underfloor heating, radiators) |



→ Reversible air-to-water heat pump

Ereba

This document is non-contractual. As part of its policy of continual product improvement, CIAT reserves the right to make any technical modification it feels appropriate without prior notification.

Head office

700 Avenue Jean Falconnier - B.P. 14
01350 - Culoz - France
Tel.: +33 (0)4 79 42 42 42
Fax: +33 (0)4 79 42 42 10
info@ciat.fr - www.ciat.com



Compagnie Industrielle d'Applications Thermiques - S.A. with a registered capital of 26 728 480 € - R.C.S. Bourg-en-Bresse B 545 620 114