

Toshiba Air Conditioning Data Sheet

401HW-E & 601XWH**W-E
R32 Estia Air to Water Heat Pump



Outdoor Model Reference				401HW-E	
Indoor Model Reference		Air T°	Water T°	601XWH**W-E	
Under Floor	Nominal Heating Capacity	+7°C	35°C	kW	4.0
Heating	Max Heating Capacity	+7°C	35°C	kW	7.25
	COP	+7°C	35°C	W/W	5.20
	Energy Efficiency Class - Low Temp Energy label		35°C		A+++
	Seasonal Space Heating Energy Efficiency		35°C	SCOP/ηs %	4.53/178
	Max Heating Capacity	-7°C	35°C	kW	4.80
	Heating Capacity *1	-7°C	35°C	kW	4.25
	COP *1	-7°C	35°C	W/W	3.06
	Max Heating Capacity	-10°C	35°C	kW	4.40
	Max Heating Capacity	-15°C	35°C	kW	3.73
	Heating Capacity *1	-15°C	35°C	kW	3.43
	COP *1	-15°C	35°C	W/W	2.54
Radiators Heating & DHW	Max Heating Capacity	+7°C	45°C	kW	6.97
	Max Heating Capacity	-7°C	45°C	kW	4.48
	Max Heating Capacity	-15°C	45°C	kW	3.37
	Max Heating Capacity	+7°C	55°C	kW	6.51
	Max Heating Capacity	-7°C	55°C	kW	4.31
	Max Heating Capacity	-10°C	55°C	kW	-
	Max Heating Capacity	-15°C	55°C	kW	-
	Energy Efficiency Class - Low Temp Energy label		55°C		A++
	Seasonal Space Heating Energy Efficiency		55°C	SCOP/ηs %	3.45/135
Cooling	Nominal Cooling Capacity	35°C	7°C	kW	4.0
	EER	35°C	7°C	W/W	3.45
	Nominal Cooling Capacity	35°C	18°C	kW	6.34
	EER	35°C	18°C	W/W	4.37

TOSHIBA

- 2 Zone with weekly timer controller
- Available hot water tank 150l / 200l / 300l
- Compact Hydro Unit with backup heater
- Quiet operation
- Smartphone control

Toshiba Air Conditioning Data Sheet

401HW-E & 601XWH**W-E
R32 Estia Air to Water Heat Pump




Outdoor Model Reference				401HW-E	
Indoor Model Reference		Air T°	Water T°	601XWH**W-E	
Operating Range	Space Heating Operation Outdoor			°C	-20 ~ 25
	Hot Water Operation Outdoor			°C	-20 ~ 43
	Cooling Operation Outdoor			°C	10 ~ 43
Operating Range	Hydro Heating Operation Indoor			°C	+20 ~ 55
	Hydro Cooling Operation Indoor			°C	+7 ~ 25
Heating Condition	Input Power	35°C	7°C	kW	0.77
	Rated Water Flow	35°C	7°C	l/m	11.6
Sound	Sound Pressure Outdoor (Rated-Silent) @ 1m *2			dB(A)	46/41
	Sound Pressure Outdoor (Rated-Silent) @ 5m *3			dB(A)	38/33
	Sound Power Outdoor (Rated-Silent)			dB(A)	60/55
Unit	Height X Width X Depth			mm	630 x 800 x 300
	Weight			kg	42
	Refrigerant Charge Amount/Chargeless to			kg/m	0.9/20
Air Flow	Standard			l/s	607
	Standard			m3/h	2184
Pipe Connection	Flare Connections (Gas - Liquid)			inch	1/2 - 1/4
	Drain Port Connection			mm	16
	Min.-Max. Length			m	5-30
	Additional refrigerant charge			g/m	20
	Maximum Height Difference			m	30
Electrical	Power Input Heating			kW	0.77
	Running Current Heating			Amps	4.08
	Power Input Cooling			kW	1.18
	Running Current Cooling			Amps	5.38
	Maximum Running Current			Amps	14.6
	Power Supply			V/ph/Hz	220-240/1/50
	Baseplate Tape heater			Watts	-
	Interconnection Cable to Hydro Indoor				2 core + earth
	Wiring Connection Power to Outdoor Unit				2 core + earth
	Suggested Fused Supply Outdoor Unit			Amps	16

TOSHIBA

- 2 Zone with weekly timer controller
- Available hot water tank 150l / 200l / 300l
- Compact Hydro Unit with backup heater
- Quiet operation
- Smartphone control

<HWT-40, 60>

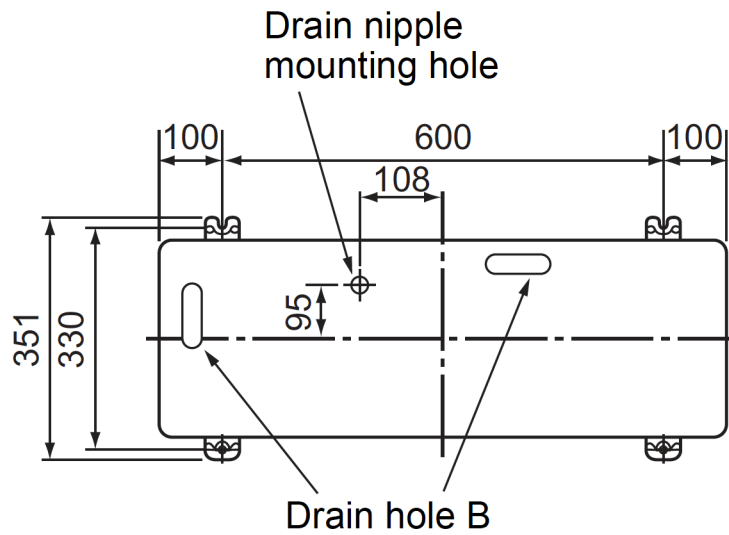

<HWT-80, 110>

