

Toshiba Air Conditioning Data Sheet


MMU-UP0071MH-E
VRF 4 WAY COMPACT CASSETTE



Model Reference	MMU-UP0071MH-E		
Capacity Code	Cooling Capacity	HP	0.8
Nominal	Heating Capacity	kW	2.2
	Cooling Total/Sensible	kW	2.5
UK	Heating	kW	2.0/1.7
	Power Input	kW	1.3
Electrical	Power Input	kW	0.023
	Run Current	Amps	0.23
	Start Current	Amps	0.41
Air Flow	High - Medium - Low	l/s	153 - 128 - 105
	High - Medium - Low	m ³ /h	552 - 462 - 378
Sound	Pressure High - Medium - Low	dB(A)	37 - 33 - 29
	Power High - Medium - Low	dB(A)	52 - 48 - 44
Unit	Height x Width x Depth	mm	256 x 575 x 575
	Weight	kg	15
Panel	Height x Width x Depth	mm	12 x 620 x 620
	Weight RBC-U41PG(W)-E	kg	2.5
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection OD/ID	mm	VP20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-3

TOSHIBA

- Smart flat-panel design
- Fit within the T-bar of grid ceiling; 620mm X 620mm
- User programmable 5-step flow
- Occupancy motion sensor
- Compact chassis perfectly suited to confined spaces.
- Built-in high lift drain pump.
- Lightweight unit, for easy and quick installation.

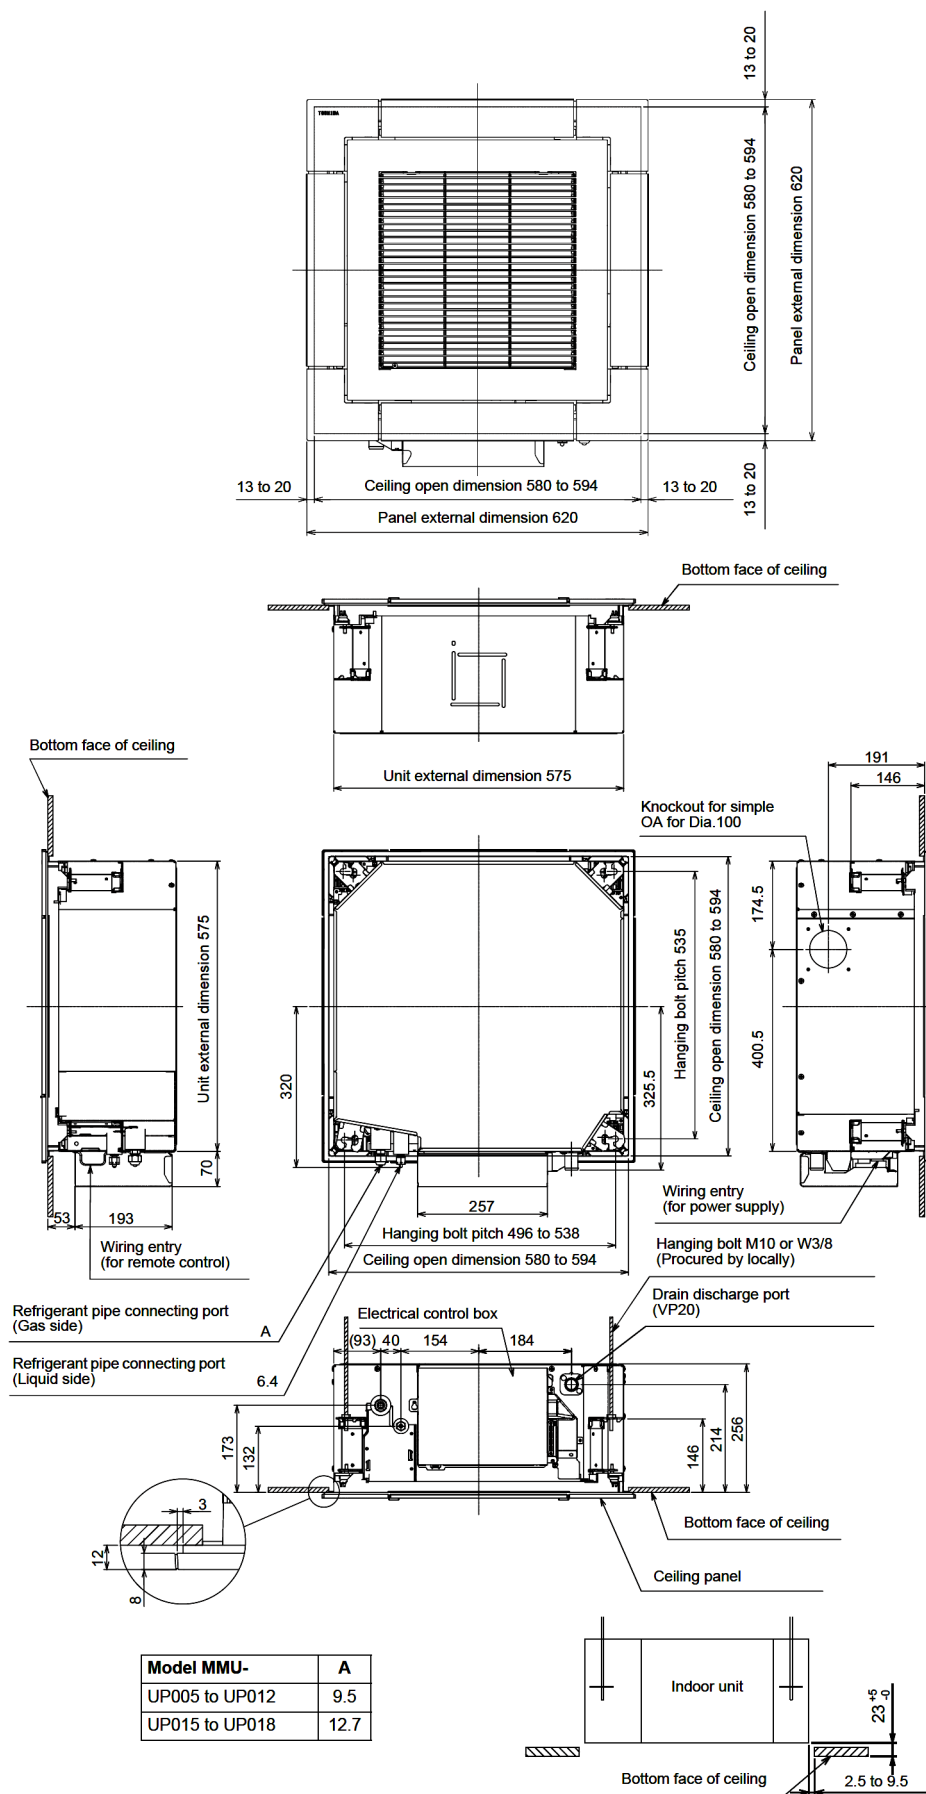

Model MMU-	A
UP005 to UP012	9.5
UP015 to UP018	12.7