

Toshiba Air Conditioning Data Sheet


MMU-UP0181MH-E
VRF 4 WAY COMPACT CASSETTE



Model Reference	MMU-UP0181MH-E		
Capacity Code	Cooling Capacity	HP	2.0
Nominal	Heating Capacity	kW	5.6
	Cooling Total/Sensible	kW	6.3
UK	Heating	kW	5.1/3.9
	Power Input	kW	3.4
Electrical	Power Input	kW	0.052
	Run Current	Amps	0.46
	Start Current	Amps	0.80
Air Flow	High - Medium - Low	l/s	233 - 167 - 145
	High - Medium - Low	m ³ /h	840 - 642 - 522
Sound	Pressure High - Medium - Low	dB(A)	47 - 39 - 34
	Power High - Medium - Low	dB(A)	62 - 54 - 49
Unit	Height x Width x Depth	mm	256 x 575 x 575
	Weight	kg	15
Panel	Height x Width x Depth	mm	12 x 620 x 620
	Weight RBC-U41PG(W)-E	kg	2.5
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	VP20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-3

TOSHIBA

- Smart flat-panel design
- Fit within the T-bar of grid ceiling; 620mm X 620mm
- User programmable 5-step flow
- Occupancy motion sensor
- Compact chassis perfectly suited to confined spaces.
- Built-in high lift drain pump.
- Lightweight unit, for easy and quick installation.

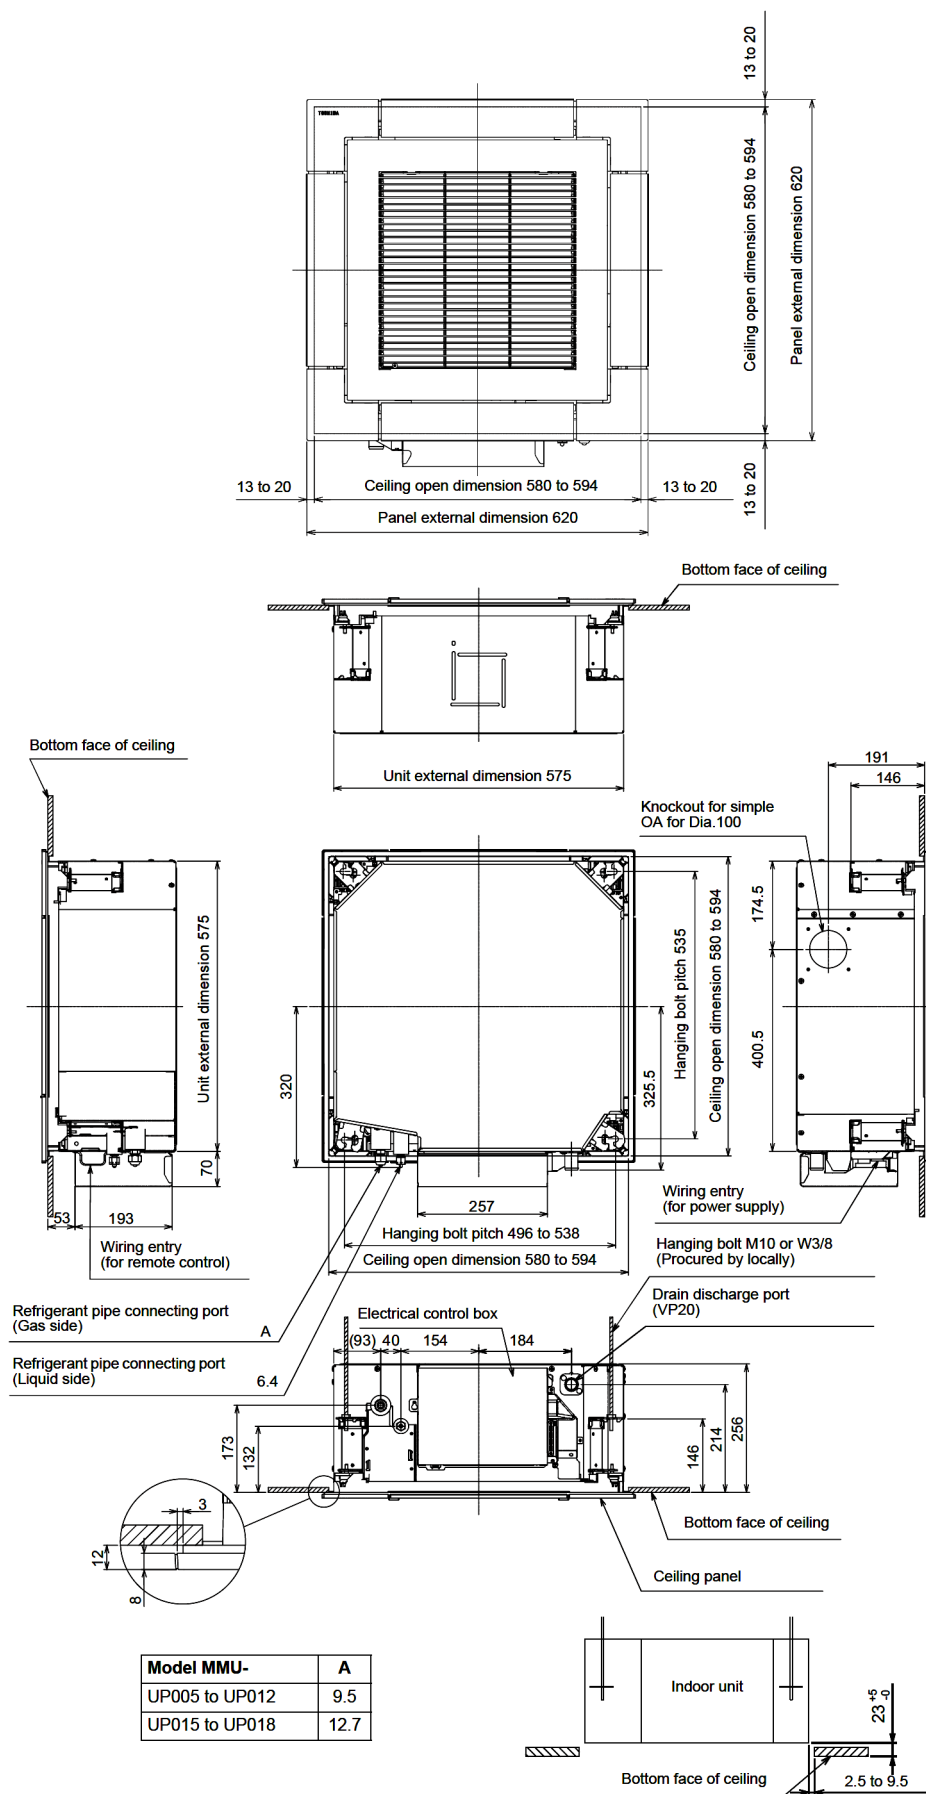

Model MMU-	A
UP005 to UP012	9.5
UP015 to UP018	12.7