


Toshiba Air Conditioning Data Sheet

MMU-UP0031YHP-E
VRF 1 WAY CASSETTE

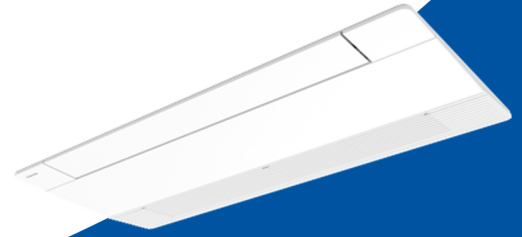

Model Reference		MMU-UP0031YHP-E	
Capacity Code		HP	0.3
Nominal	Cooling Capacity	kW	0.9
	Heating Capacity	kW	1.3
UK	Cooling Total/Sensible	kW	0.8/0.6
	Heating	kW	0.9
Electrical	Power Input	kW	0.015
	Run Current	Amps	0.15
	Start Current	Amps	0.40
Air Flow	High - Medium - Low	l/s	133 - 102 - 75
	High - Medium - Low	m ³ /h	480 - 370 - 270
Sound	Pressure High - Medium - Low	dB(A)	37 - 33 - 25
	Power High - Medium - Low	dB(A)	52 - 48 - 40
Unit	Height x Width x Depth	mm	150 x 990 x 450
	Weight	kg	14
Panel	Height x Width x Depth	mm	30 x 1220 x 530
	Weight RBC-UY32P-E	kg	4
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection OD/ID	mm	32/25
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

TOSHIBA

- Low noise level that can operate down to 25dB(A)
- Advanced filtration available as an option
- Smart operation with Motion sensor available
- Ultra-thin chassis 150 X 990 X 450mm (YHP model)
- Ideal for false ceiling applications
- Water condensate drain pump lifts condensate water up to 350mm.

External dimensions

(Unit: mm)

