


## Toshiba Air Conditioning Data Sheet

MMU-UP0121YHP-E  
VRF 1 WAY CASSETTE

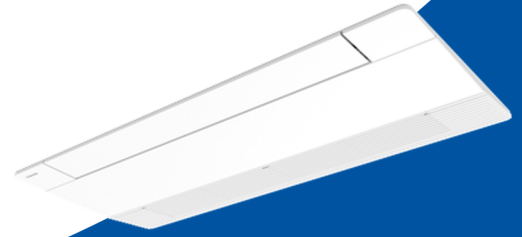

Model Reference		MMU-UP0121YHP-E	
<b>Capacity Code</b>		HP	1.3
Nominal	Cooling Capacity	kW	3.6
	Heating Capacity	kW	4.0
UK	Cooling Total/Sensible	kW	3.3/2.4
	Heating	kW	2.7
Electrical	Power Input	kW	0.018
	Run Current	Amps	0.20
	Start Current	Amps	0.40
Air Flow	High - Medium - Low	l/s	150 - 133 - 117
	High - Medium - Low	m <sup>3</sup> /h	540 - 420 - 290
Sound	Pressure High - Medium - Low	dB(A)	40 - 36 - 26
	Power High - Medium - Low	dB(A)	55 - 51 - 41
Unit	Height x Width x Depth	mm	150 x 990 x 450
	Weight	kg	14
Panel	Height x Width x Depth	mm	30 x 1220 x 530
	Weight RBC-UY32P-E	kg	4
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection OD/ID	mm	32/25
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

# TOSHIBA

- Low noise level that can operate down to 25dB(A)
- Advanced filtration available as an option
- Smart operation with Motion sensor available
- Ultra-thin chassis 150 X 990 X 450mm (YHP model)
- Ideal for false ceiling applications
- Water condensate drain pump lifts condensate water up to 350mm.

## External dimensions

(Unit: mm)

