


## Toshiba Air Conditioning Data Sheet

MMU-UP0151SH-E  
VRF 1 WAY CASSETTE

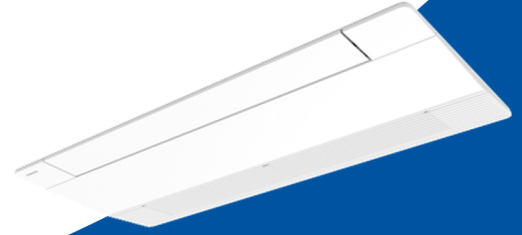


Model Reference		MMU-UP0151SH-E	
<b>Capacity Code</b>		HP	1.7
Nominal	Cooling Capacity	kW	4.5
	Heating Capacity	kW	5.0
UK	Cooling Total/Sensible	kW	4.1/3.0
	Heating	kW	3.4
Electrical	Power Input	kW	0.042
	Run Current	Amps	0.34
	Start Current	Amps	0.51
Air Flow	High - Medium - Low	l/s	208 - 192 - 175
	High - Medium - Low	m <sup>3</sup> /h	750 - 690 - 630
Sound	Pressure High - Medium - Low	dB(A)	37 - 35 - 32
	Power High - Medium - Low	dB(A)	52 - 50 - 47
Unit	Height x Width x Depth	mm	200 x 1000 x 710
	Weight	kg	21
Panel	Height x Width x Depth	mm	20 x 1230 x 800
	Weight RBC-UY32P-E	kg	5.5
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	32/25
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

# TOSHIBA

- Low noise level that can operate down to 25dB(A)
- Advanced filtration available as an option
- Smart operation with Motion sensor available
- Ultra-thin chassis 150 X 990 X 450mm (YHP model)
- Ideal for false ceiling applications
- Water condensate drain pump lifts condensate water up to 350mm.

MMU-UP0151SH-E, MMU-UP0181SH-E

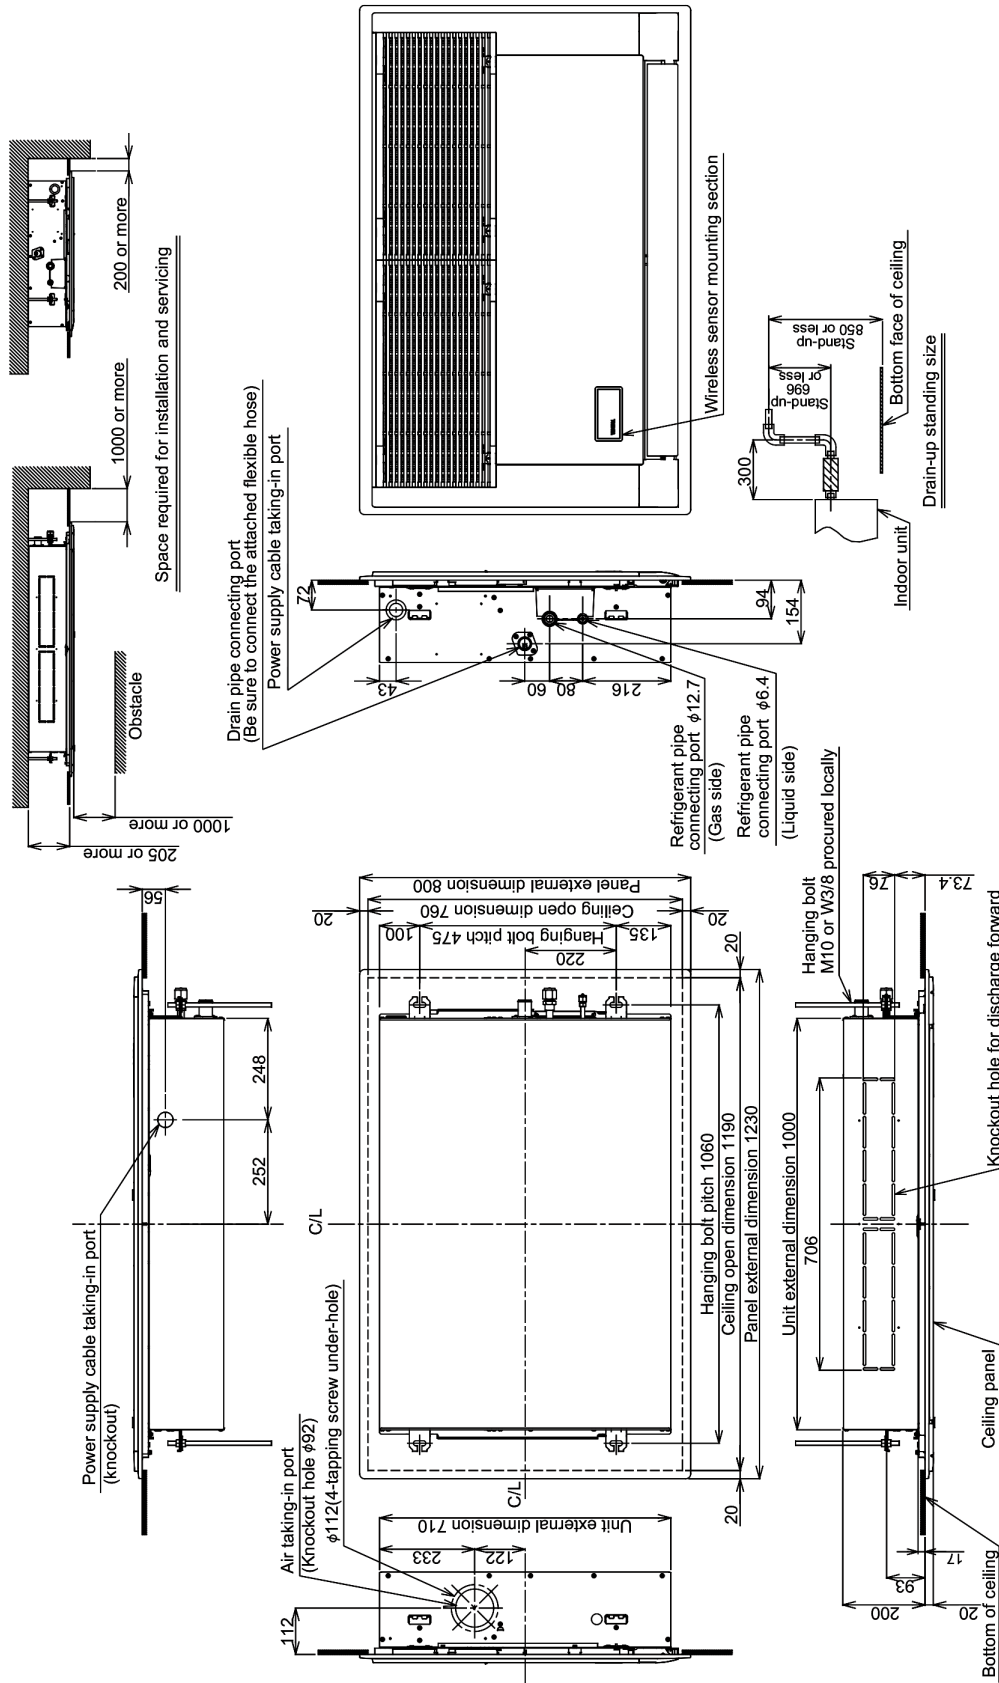

(Unit:mm)