


## Toshiba Air Conditioning Data Sheet

MMU-UP0241SH-E  
VRF 1 WAY CASSETTE

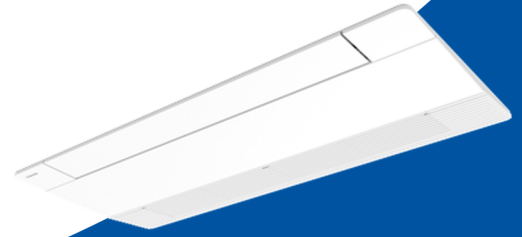

Model Reference		MMU-UP0241SH-E	
<b>Capacity Code</b>		HP	2.5
Nominal	Cooling Capacity	kW	7.1
	Heating Capacity	kW	8.0
UK	Cooling Total/Sensible	kW	6.4/4.7
	Heating	kW	5.4
Electrical	Power Input	kW	0.075
	Run Current	Amps	0.62
	Start Current	Amps	0.80
Air Flow	High - Medium - Low	l/s	317 - 267 - 225
	High - Medium - Low	m <sup>3</sup> /h	1140 - 960 - 810
Sound	Pressure High - Medium - Low	dB(A)	45 - 41 - 37
	Power High - Medium - Low	dB(A)	60 - 56 - 52
Unit	Height x Width x Depth	mm	200 x 1000 x 710
	Weight	kg	22
Panel	Height x Width x Depth	mm	20 x 1230 x 800
	Weight RBC-US21PGE	kg	5.5
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 3/8
	Drain Pipe Connection OD/ID	mm	32/25
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

# TOSHIBA

- Low noise level that can operate down to 25dB(A)
- Advanced filtration available as an option
- Smart operation with Motion sensor available
- Ultra-thin chassis 150 X 990 X 450mm (YHP model)
- Ideal for false ceiling applications
- Water condensate drain pump lifts condensate water up to 350mm.

