


Toshiba Air Conditioning Data Sheet

MMU-UP0301H-E
VRF 4 WAY SMART CASSETTE

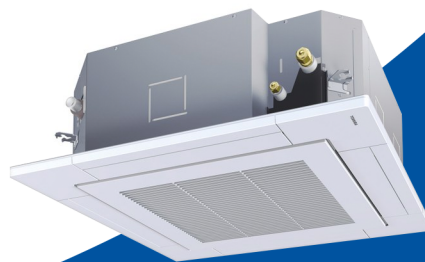


Model Reference		MMU-UP0301H-E	
Capacity Code		HP	3.2
Nominal	Cooling Capacity	kW	9.0
	Heating Capacity	kW	10.0
UK	Cooling Total/Sensible	kW	8.2/5.9
	Heating	kW	6.8
Electrical	Power Input	kW	0.068
	Run Current	Amps	0.60
	Start Current	Amps	0.90
Air Flow	High - Medium - Low	l/s	539 - 422 - 389
	High - Medium - Low	m ³ /h	1940 - 1520 - 1400
Sound	Pressure High - Medium - Low	dB(A)	44 - 39 - 37
	Power High - Medium - Low	dB(A)	58 - 53 - 51
Unit	Height x Width x Depth	mm	319 x 840 x 840
	Weight	kg	25
Panel	Height x Width x Depth	mm	30 x 950 x 950
	Weight RBC-U41PG(W)-E	kg	5
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	32/25
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

TOSHIBA

- Top class SEER and SCOP
- Energy saving with the occupancy sensor
- Unique louvre design for optimal air distribution
- Individual setting of louver position: 3 different swing modes: standard, diagonally, opposite or turn around
- 5 fan steps to precisely control the air flow.
- Simple & elegant design fits various rooms.

MMU-UP0241H-E, MMU-UP0271H-E, MMU-UP0301H-E

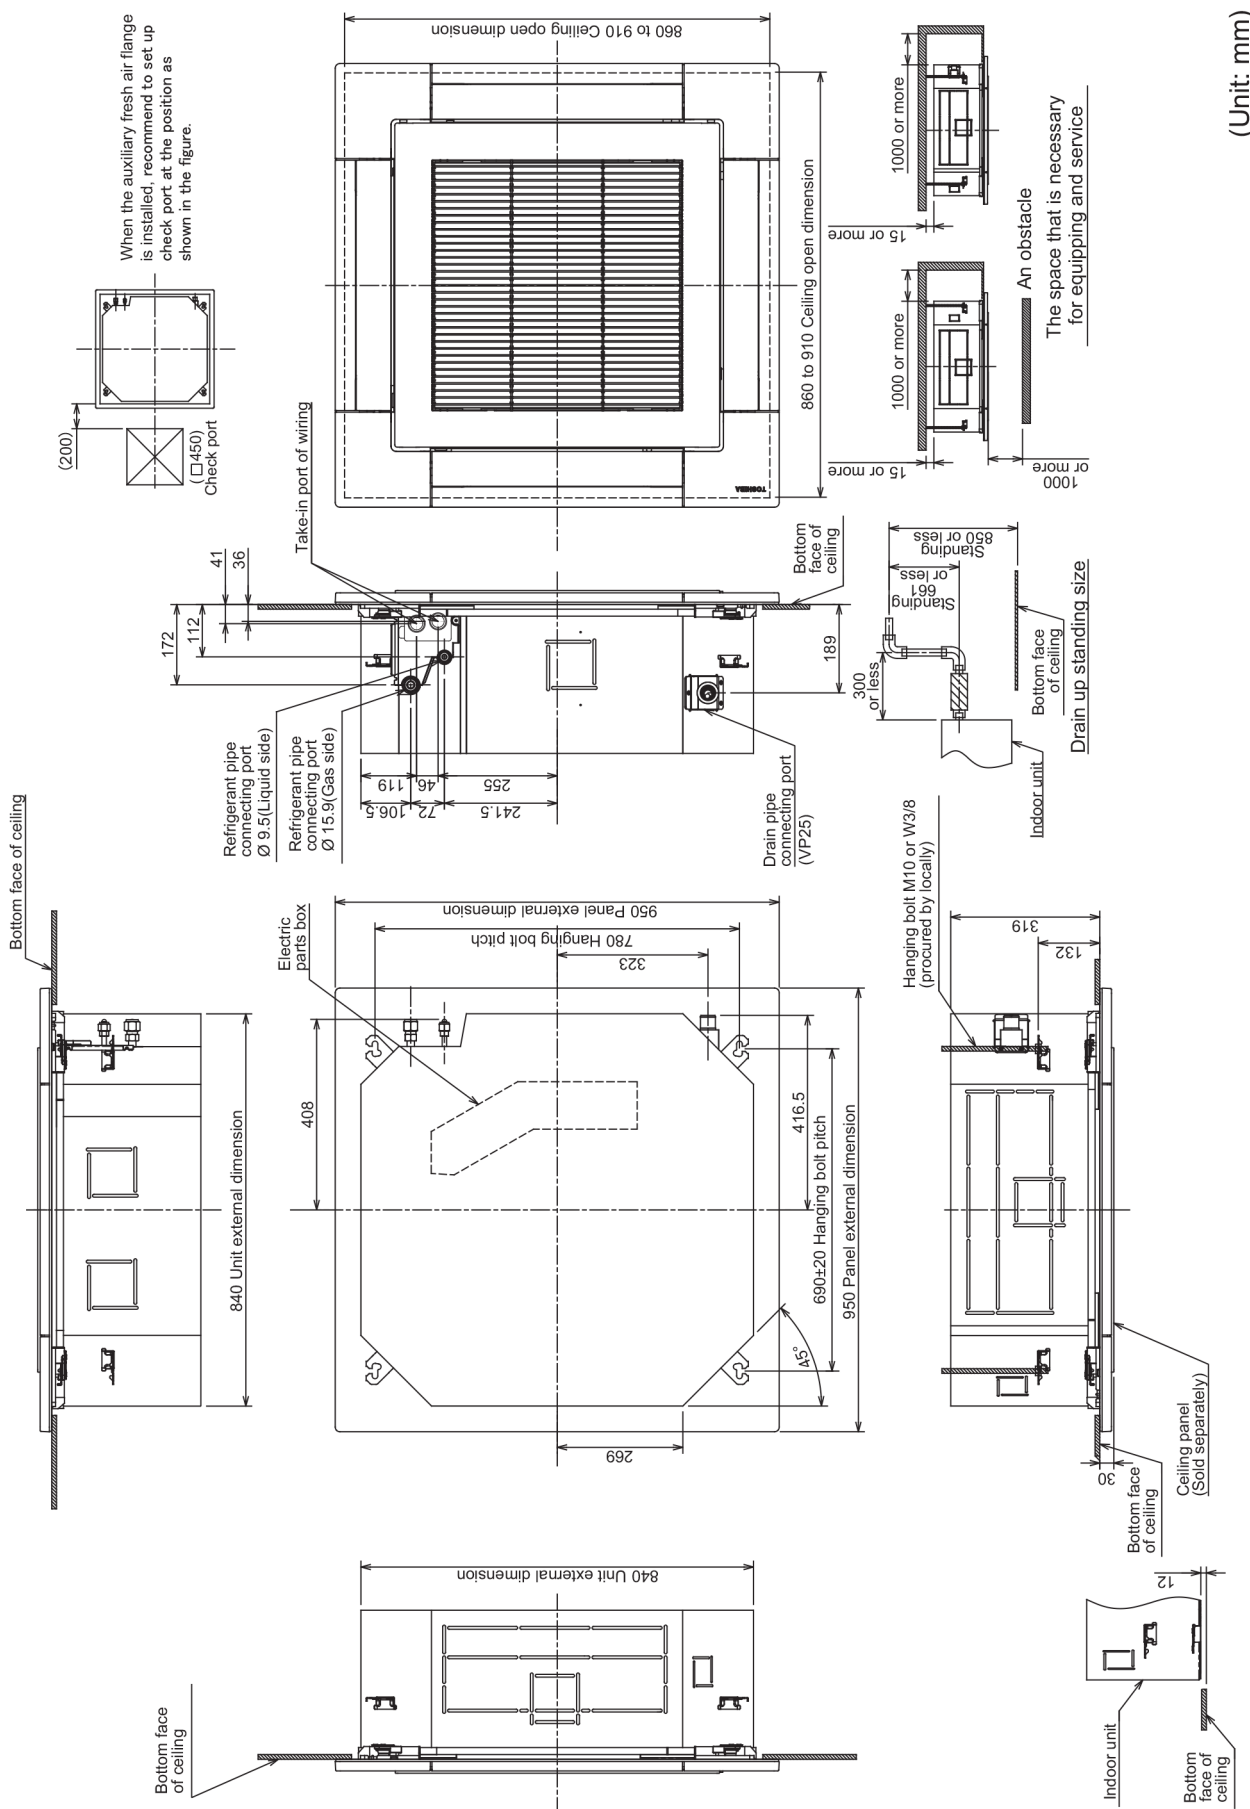

(Unit: mm)