

Toshiba Air Conditioning Data Sheet


MMU-UP0361HP-E
VRF 4 WAY CASSETTE



Model Reference		MMU-UP0361HP-E	
Capacity Code		HP	4.0
Nominal	Cooling Capacity	kW	11.2
	Heating Capacity	kW	12.5
UK	Cooling Total/Sensible	kW	10.2/7.3
	Heating	kW	8.5
Electrical	Power Input	kW	0.088
	Run Current	Amps	0.78
	Start Current	Amps	0.87
Air Flow	High - Medium - Low	l/s	547 - 397 - 297
	High - Medium - Low	m ³ /h	1970 - 1430 - 1070
Sound	Pressure High - Medium - Low	dB(A)	43 - 38 - 32
	Power High - Medium - Low	dB(A)	58 - 53 - 47
Unit	Height x Width x Depth	mm	319 x 840 x 840
	Weight	kg	25
Panel	Height x Width x Depth	mm	30 x 950 x 950
	Weight RBC-U41PG(W)-E	kg	4
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	32/25
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

TOSHIBA

- Two louver shape option
- Possible to set three different and swing modes
- Wide air flow in all directions
- Optimal air diffusion up to 4.6m ceiling height!
- Self-cleaning function and Ag-ion tip for anti-mould in drain cap
- Built-in high-lift drain pump
- Compact chassis with only 256mm height (up to size 30)
- Lightweight unit, for easy and quick installation

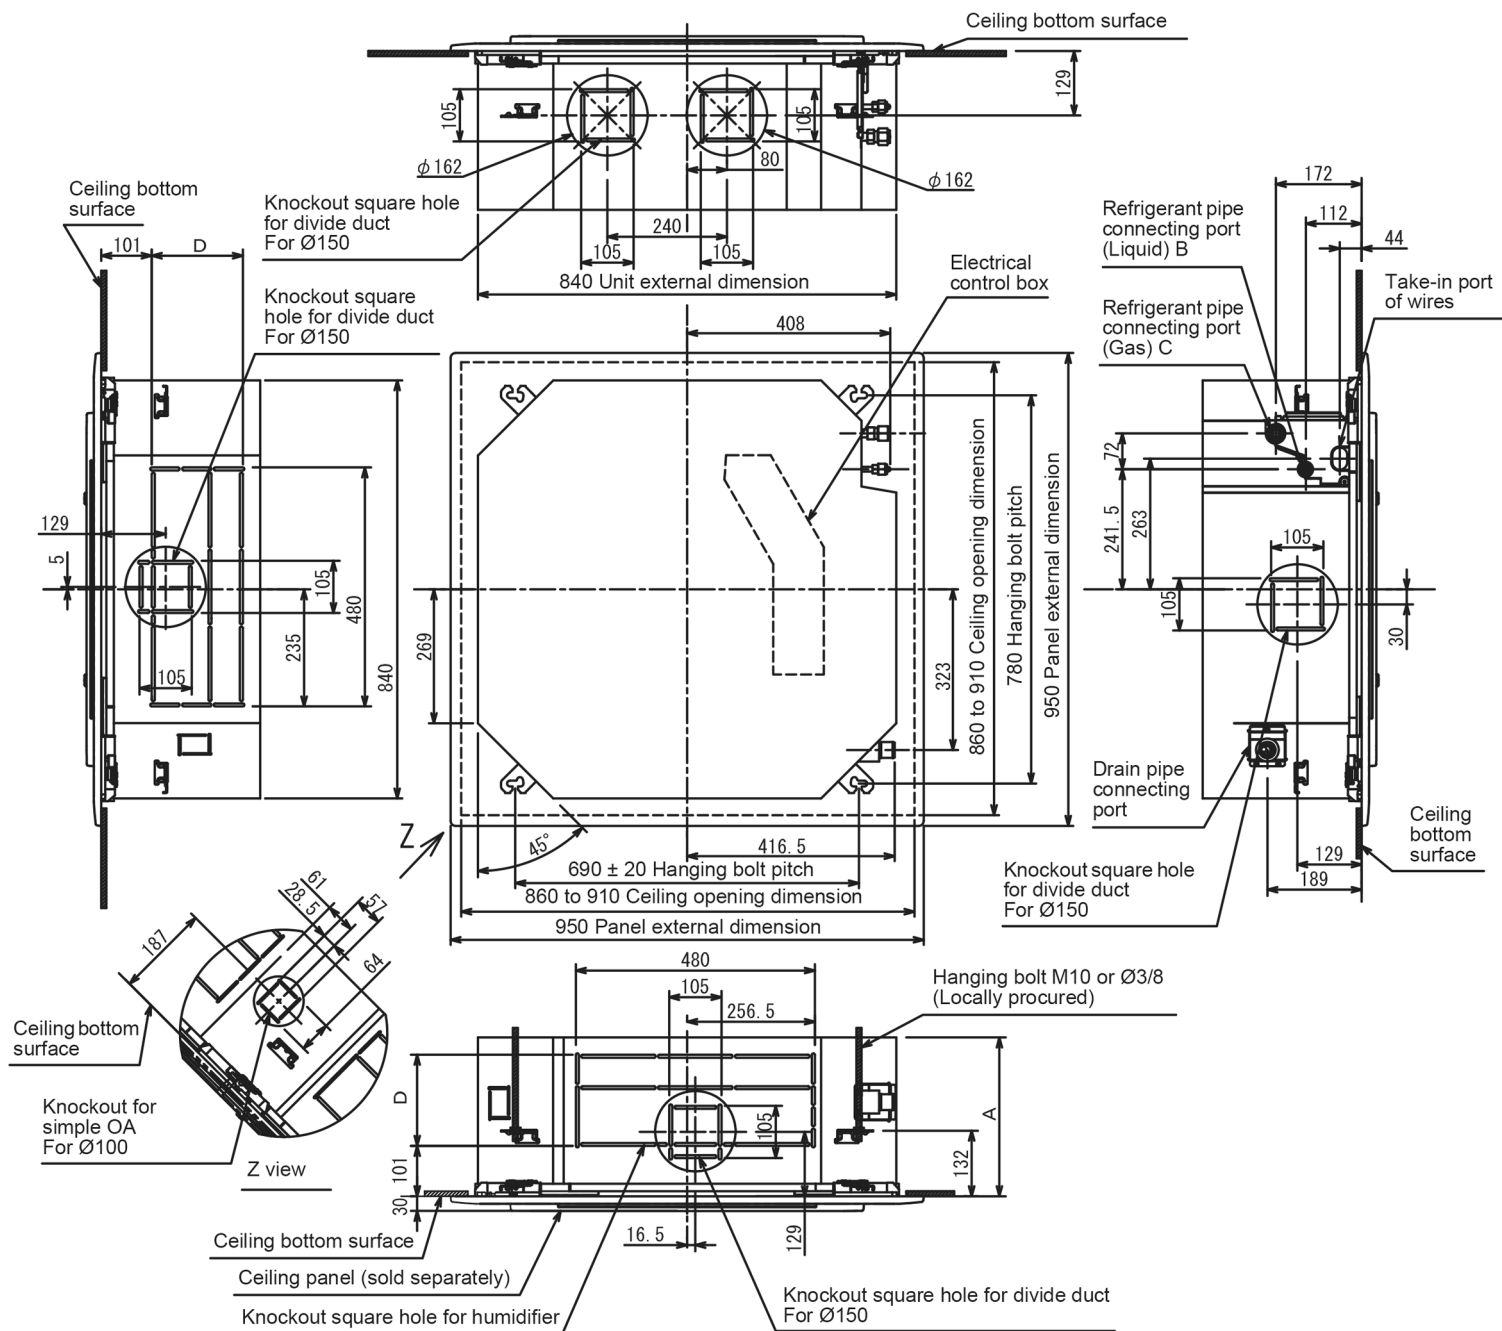

(mm)

Model MMU-	A	B	C	D	Model MMU-	A	B	C	D
UP009 to UP012	256	Ø6.4	Ø9.5	120	UP024 to UP030	256	Ø9.5	Ø15.9	120
UP015 to UP018	256	Ø6.4	Ø12.7	120	UP036 to UP056	319	Ø9.5	Ø15.9	183