


Toshiba Air Conditioning Data Sheet

MMU-UP0561H-E
VRF 4 WAY SMART CASSETTE

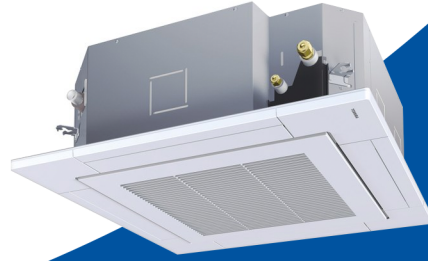


Model Reference		MMU-UP0561H-E	
Capacity Code		HP	6
Nominal	Cooling Capacity	kW	16.0
	Heating Capacity	kW	18.0
UK	Cooling Total/Sensible	kW	14.5/10.4
	Heating	kW	12.2
Electrical	Power Input	kW	0.137
	Run Current	Amps	0.97
	Start Current	Amps	1.46
Air Flow	High - Medium - Low	l/s	628 - 495 - 390
	High - Medium - Low	m ³ /h	2262 - 1782 - 1404
Sound	Pressure High - Medium - Low	dB(A)	46 - 40 - 35
	Power High - Medium - Low	dB(A)	61 - 55 - 51
Unit	Height x Width x Depth	mm	319 x 840 x 840
	Weight	kg	25
Panel	Height x Width x Depth	mm	30 x 950 x 950
	Weight RBC-U41PG(W)-E	kg	5
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	32/25
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

TOSHIBA

- Top class SEER and SCOP
- Energy saving with the occupancy sensor
- Unique louvre design for optimal air distribution
- Individual setting of louver position: 3 different swing modes: standard, diagonally, opposite or turn around
- 5 fan steps to precisely control the air flow.
- Simple & elegant design fits various rooms.

MMU-UP0241H-E, MMU-UP0271H-E, MMU-UP0301H-E

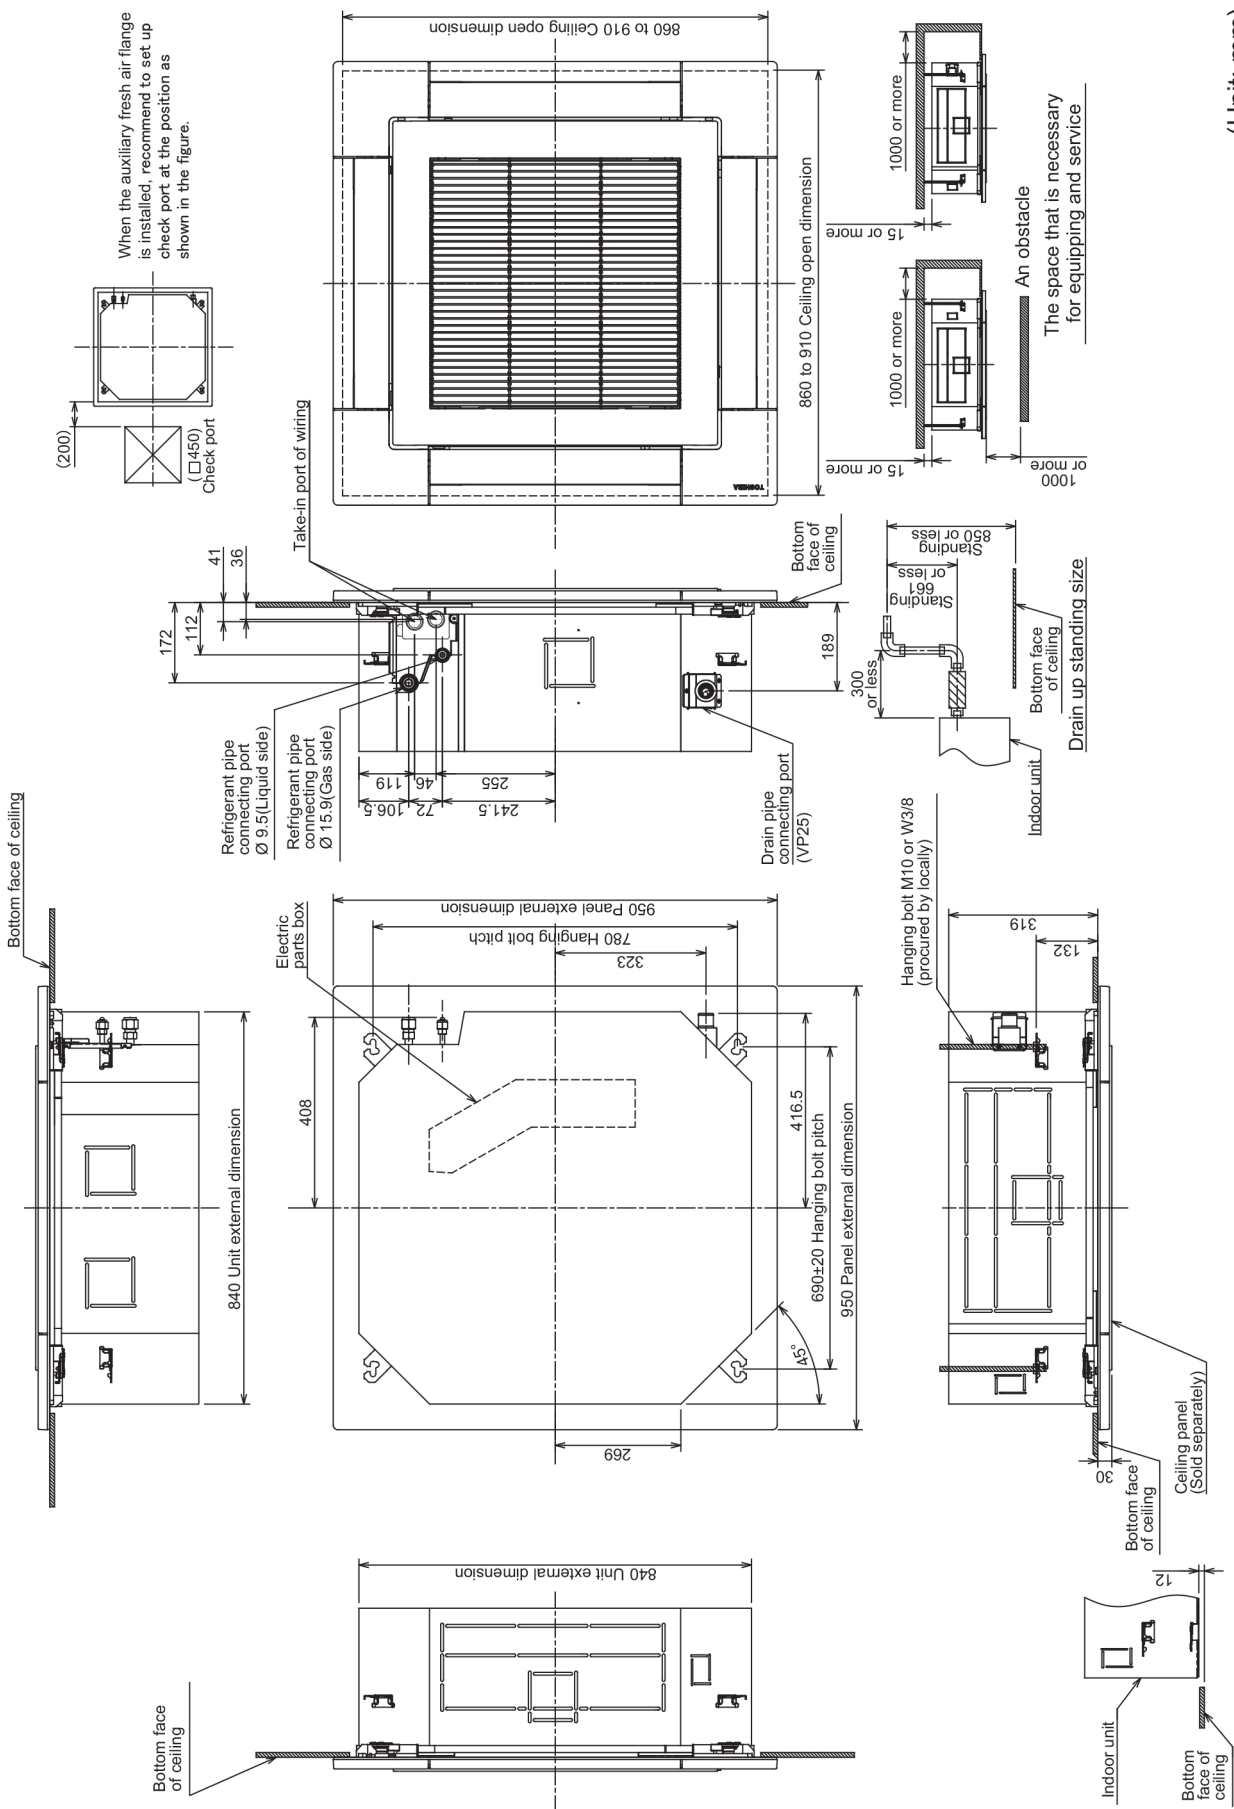

(Unit: mm)