


Toshiba Air Conditioning Data Sheet

MML-UP0091BH-E
VRF CONCEALED CHASSIS

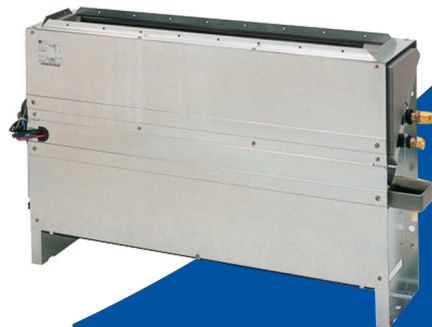

Model Reference		MML-UP0091BH-E	
Capacity Code		HP	1.0
Nominal	Cooling Capacity	kW	2.8
	Heating Capacity	kW	3.2
UK	Cooling Total/Sensible	kW	2.5/1.5
	Heating	kW	2.2
Electrical	Power Input	kW	0.056
	Run Current	Amps	0.25
	Start Current	Amps	0.60
Air Flow	High - Medium - Low	l/s	128 - 111 - 83
	High - Medium - Low	m3/h	460 - 400 - 300
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	36 - 34 - 32
	Power High - Medium - Low	dB(A)	51 - 49 - 47
Unit	Height x Width x Depth	mm	600 x 745 x 220
	Weight	kg	21
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection OD/ID	mm	20 male screw
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

TOSHIBA

- Fits perfectly for specialist applications
- Very compact design
- Maximum space saving
- Removable split front panel with immediate access to the main components.

MML-UP0071BH-E, MML-UP0091BH-E, MML-UP0121BH-E

