


## Toshiba Air Conditioning Data Sheet

MML-UP0151BH-E  
VRF CONCEALED CHASSIS

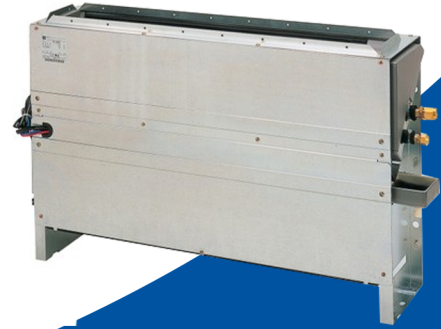

Model Reference		MML-UP0151BH-E	
<b>Capacity Code</b>		HP	1.7
Nominal	Cooling Capacity	kW	4.5
	Heating Capacity	kW	5.0
UK	Cooling Total/Sensible	kW	4.1/2.7
	Heating	kW	3.4
Electrical	Power Input	kW	0.090
	Run Current	Amps	0.45
	Start Current	Amps	0.80
Air Flow	High - Medium - Low	l/s	206 - 167 - 136
	High - Medium - Low	m <sup>3</sup> /h	740 - 600 - 490
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	36 - 34 - 32
	Power High - Medium - Low	dB(A)	51 - 49 - 47
Unit	Height x Width x Depth	mm	600 x 1045 x 220
	Weight	kg	29
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	20 male screw
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

# TOSHIBA

- Fits perfectly for specialist applications
- Very compact design
- Maximum space saving
- Removable split front panel with immediate access to the main components.

