


Toshiba Air Conditioning Data Sheet

MML-UP0241BH-E
VRF CONCEALED CHASSIS

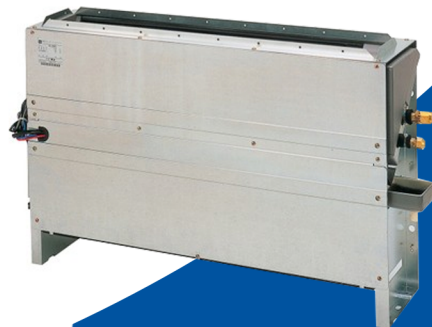

Model Reference		MML-UP0241BH-E	
Capacity Code		HP	2.5
Nominal	Cooling Capacity	kW	7.1
	Heating Capacity	kW	8.0
UK	Cooling Total/Sensible	kW	6.4/4.2
	Heating	kW	5.4
Electrical	Power Input	kW	0.095
	Run Current	Amps	0.46
	Start Current	Amps	1.00
Air Flow	High - Medium - Low	l/s	264 - 219 - 178
	High - Medium - Low	m3/h	950 - 790 - 640
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	42 - 37 - 33
	Power High - Medium - Low	dB(A)	57 - 52 - 48
Unit	Height x Width x Depth	mm	600 x 1045 x 220
	Weight	kg	29
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	20 male screw
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

TOSHIBA

- Fits perfectly for specialist applications
- Very compact design
- Maximum space saving
- Removable split front panel with immediate access to the main components.

MML-UP0151BH-E, MML-UP0181BH-E

