'OSH<u>IB</u>/ А


Toshiba Air Conditioning Data Sheet Wall Mounted RAV-HM301KRTP-E

Features

- Run/Standby available with U series remote control (rotation/backup) .
- Self-cleaning feature to prevent mould formation on the heat exchanger coils
- Suitable for single/twin/triple/quad connections
- Uses Toshiba TU2C-Link control platform (backward compatible)
- **R32 Refrigerant**
- Auto louver mode allows optimum and uniform air distribution
- Wireless remote control with pre-set functions; hi-power mode, quiet mode, comfort sleep, eco-mode
- Replacement technology' enabling the re-use of existing R410A, R22 or R407C pipework
- Power to outdoor, please see condensing unit sheet for supply requirements



Model Reference			RAV-HM301KRTP-E
Cooling	Nominal Cooling Capacity	kW	2.5
	UK Cooling Total/Sensible	kW	2.37/1.97
	Power Input (rated)	kW	0.61
Energy Efficiency Class (connected to standard DI outdoor)	SEER/Energy Efficiency Class		6.36/A++
Heating	Nominal Heating Capacity	kW	3.4
	UK Heating	kW	2.43
	Power Input	kW	0.85
Energy Efficiency Class (connected to standard DI outdoor)	SCOP/Energy Efficiency Class		4.1 / A+
Air Flow	High - Medium - Low	l/s	186 - 150 - 125
	High - Medium - Low	m3/h	670 - 540 - 450
Sound	Pressure High - Medium - Low	dB(A)	40 - 34 - 29
	Power High - Medium - Low	dB(A)	55 - 49 - 44
Unit	Height x Width x Depth	mm	293 - 798 - 230
	Weight	kg	10
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 -1/4

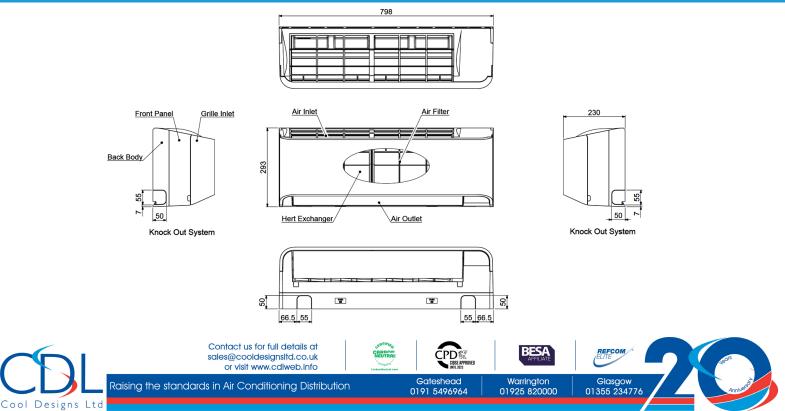

Rated conditions: Cooling : Indoor 27 degC Dry Bulb / 19 degC Wet Bulb , Outdoor 35 degC Dry Bulb. Heating : Indoor 20 degC Dry Bulb , Outdoor 7 degC Dry Bulb / 6 degC WetBulb. Based on equivalent piping length of 7.5m and piping height difference of 0m. Data from Toshiba Air Conditioning 2022