

SEIYA: RAS - B13E2KVG-E1

- A++ in both Heating and cooling.
- Power supply to indoor or outdoor unit.
- Compatible with WI-FI when utilizing adapter.
- Sleek and compact suitable for all applications.
- Available in both single and multi split applications.



Retail Price (interactive icons):




UK



ROI



Hi - Res Image 

ENTRY TIER PRODUCT RANGE

CODE		33		
Performance				
Indoor Unit		RAS-	B13E2KVG-E1	
Outdoor Unit		RAS-	13E2AVG-E	
Nominal	Cooling Capacity	kW	3.3	
	Heating Capacity	kW	3.6	
	EER/COP	W/W	3.30/4.14	
UK	Cooling Total/Sensible	kW	3.22/2.49	
	Heating	kW	2.20	
Cooling EN14825	Range Min. - Max.	kW	1.20 - 3.60	
	Power Input	kW	1.00	
	Pdesign	kW	3.3	
	SEER/Energy Efficiency Class			7.00/A++
	Seasonal Energy Consumption	kWh/a		165
Heating EN14825	Range Min. - Max.	kW	0.97 - 4.50	
	Power Input	kW	0.87	
	Pdesign	kW	2.7	
	SCOP/Energy Efficiency Class			4.60/A++
	Seasonal Energy Consumption	kWh/a		822
Indoor Data				
Air Flow	High - Low	l/s	208 - 92	
	High - Low	m3/h	750 - 330	
Sound	Pressure High - Low	dB(A)	42 - 21	
	Power High - Low	dB(A)	54	
Unit	Height x Width x Depth	mm	293 x 798 x 230	
	Weight	kg	9	
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8" - 1/4"	
	Drain Pipe Connection OD/ID	mm	16/14	
Remote controller			WH-TG01NE	


Accessories

RB-RXS33-E	Option Remote Controller (Weekly Timer)
RB-RXS34-E	Option Black remote
RB-N105S-G	Wireless adapter (Without cable)

*All [Accessories / Controls](#)

Related Items:

- [BIM Files](#)
- [Full Specification](#)
- [Dimensional Drawing](#)
- [Wiring Diagram](#)
- [Airflow/ Fan Curve](#)
- [Installation Manual](#)
- [Owners Manual](#)

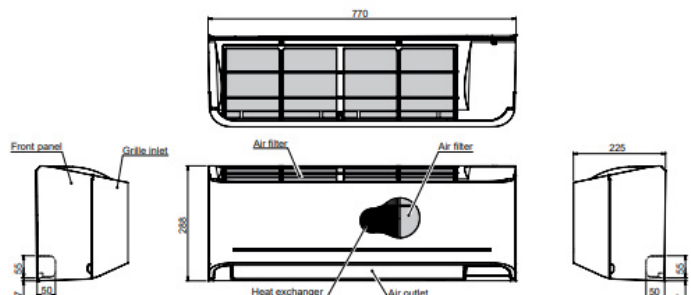

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution