

VRF STANDARD HIGH WALL: MMK - UP0091HP-E

- Special fin coating for healthy & fresh air.
- New appearance, simple, elegant with led display.
- Perfect for limited spaces, such as offices or small shops.
- Filters for dust collection can be easily removed and easily cleaned.
- New compact design (only 293x798x230 mm) and lightweight (11 kg).



Hi - Res Image

Performance Data

| | | | |
|---------------|------------------------|------|---------|
| Capacity Code | | HP | 1.0 |
| Nominal | Cooling Capacity | kW | 2.8 |
| | Heating Capacity | kW | 3.2 |
| UK | Cooling Total/Sensible | kW | 2.5/1.9 |
| | Heating | kW | 2.2 |
| Electrical | Power Input | kW | 0.016 |
| | Run Current | Amps | 0.17 |
| | Start Current | Amps | 0.21 |

Indoor Data

| | | | |
|-------------------|----------------------------------|-----------|-----------------|
| Airflow | High - Medium - Low | l/s | 141 - 110 - 75 |
| | High - Medium - Low | m3/h | 510 - 395 - 270 |
| Sound | Pressure High - Medium - Low | dB(A) | 36 - 31 - 25 |
| | Power High - Medium - Low | dB(A) | 51 - 46 - 40 |
| Unit | Height x Width x Depth | mm | 293 x 798 x 230 |
| | Weight | kg | 11 |
| Pipe Connection | Flare Connections (gas - liquid) | inch | 3/8 - 1/4 |
| | Drain Pipe Connection OD/ID | mm | 16/14 |
| Power Supply | Suggested Fuse Size | V/ph/Hz-A | 220-240/1/50-5 |
| Remote Controller | WH-TA09NE (Infra-Red) | | |

Accessories

| | |
|------------------------------|---|
| RBC-AMTU31-E | Standard Remote Controller - Full control including service functions |
| RBC-ASCU11-E | Compact Remote Controller - Includes timer off, back light display, multilingual |
| RBC-AMSU51-E | Standard Remote Controller - Includes timer, back light display, power-save functions, multilingual |
| RBC-AWSU52-E | Premium Controller - Includes timer and back light display, multilingual (inc. Bluetooth) |
| RBC-MTSC1 | Mini Touch Screen Controller - with configurable icons for indoor units |
| RBC-MTSC2 | Mini Touch Screen Controller - with Schedule Timer, configurable icons for indoor units |

*All [Accessories](#) / [Controls](#)

Compatible R410a outdoor condensers:


[Mini SMMS-e](#), [SMMS-u](#), [SHRM-e](#)

Compatible R32 outdoor condensers:

[Mini SMMS](#), [SHRM-a](#)

Related items:

- [Full specification](#)
- [BIM files](#)
- [CAD files](#)
- [Airflow/ fan curve](#)
- [Dimensional drawing](#)
- [Wiring diagram](#)
- [Noise curve data](#)
- [Installation manual](#)

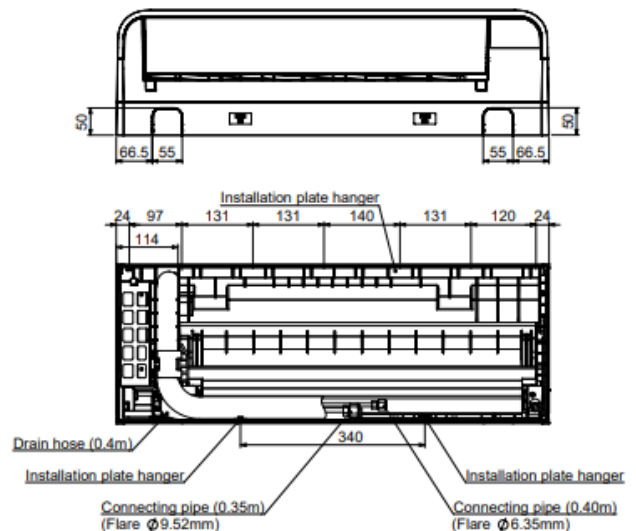

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution