


## VRF 4-WAY SMART CASSETTE: MMU - UP0301H-E

- Simple & elegant design fits various rooms.
- 5 fan steps to precisely control the air flow.
- Unique louvre design for optimal air distribution.
- Top class SEER and SCOP, thanks to long split heat exchanger with magic coil treatment.
- Energy saving with the occupancy sensor, automatically switch off the unit if nobody is in the room.



Hi - Res Image 



### Performance Data

Capacity Code		HP	3.2
Nominal	Cooling Capacity	kW	9.0
	Heating Capacity	kW	10.0
UK	Cooling Total/Sensible	kW	8.2/5.9
	Heating	kW	6.8
Electrical	Power Input	kW	0.068
	Run Current	Amps	0.6
	Start Current	Amps	0.9

### Indoor Data

Airflow	High - Medium - Low	l/s	539 - 422 - 389
	High - Medium - Low	m3/h	1940 - 1520 - 1400
Sound	Pressure High - Medium - Low	dB(A)	44 - 39 - 37
	Power High - Medium - Low	dB(A)	58 - 53 - 51
Unit	Height x Width x Depth	mm	319 x 840 x 840
	Weight	kg	25
Panel	Height x Width x Depth	mm	30 x 950 x 950
	Weight RBC-U41PG(W)-E	kg	5
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	32/25
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

### Accessories

<a href="#">RBC-AMTU31-E</a>	Standard Remote Controller - Full control including service functions
<a href="#">RBC-ASCU11-E</a>	Compact Remote Controller - Includes timer off, back light display, multilingual
<a href="#">RBC-AWSU52-E</a>	Premium Controller - Includes timer and back light display, multilingual (inc. Bluetooth)
<a href="#">RBC-MTSC1</a>	Mini Touch Screen Controller - with configurable icons for indoor units
<a href="#">RBC-MTSC2</a>	Mini Touch Screen Controller - with Schedule Timer, configurable icons for indoor units
<a href="#">TCB-SIR41U-E</a>	Occupancy sensor - Cannot be used with wireless remote control kit.
<a href="#">RBC-AXU41U-E</a>	Wireless remote kit - Cannot be used with Occupancy sensor
<a href="#">TCB-FF101URE2</a>	Auxiliary fresh air flange - For easy fresh air intake by using knock out hole of indoor.

\*All [Accessories](#) / [Controls](#)

Compatible R410a outdoor condensers:


[Mini SMMS-e](#), [SMMS-u](#), [SHRM-e](#)

Compatible R32 outdoor condensers:

[Mini SMMS](#), [SHRM-a](#)

Related items:

- [Full specification](#)
- [Airflow/ fan curve](#)
- [Dimensional drawing](#)
- [Wiring diagram](#)
- [Noise curve data](#)
- [Installation manual](#)

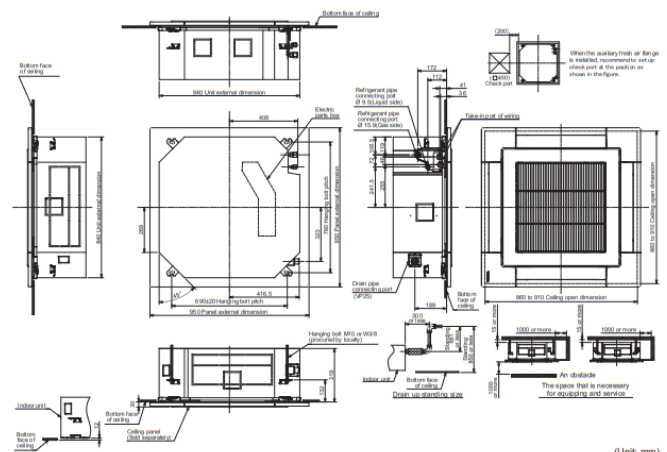

(Unit: mm)

