RAV - Digital Inverter - Standard Duct - 1101 - 1ph & 3ph

- Up to 120Pa available pressure
- Built-in high-lift drain pump to 850mm
- Fresh air intake supply via a pre-punched knock-out hole
- Compact and thin chassis, measuring just 275mm in height
- Standard rear inlet design or as an alternative, from the underside of the unit

Hi - Res Image

Retail Price (interactive icons):

STANDARD PRODUCT RANGE				
Performance				
Indoor Unit		RAV-	HM1101BTP-E	HM1101BTP-E
Outdoor Unit		RAV-	GM1101ATP-E	GM1101AT8P-E
Nominal	Cooling Capacity	kW	9.5	9.5
	Heating Capacity	kW	11.2	11.2
	EER/COP	W/W	3.18/3.75	3.18/3.75
UK	Cooling Total/Sensible	kW	9.10/7.37	9.10/7.37
	Heating	kW	8.01	8.01
Cooling EN14825	Range Min. - Max.	kW	3.0 - 11.2	3.0 - 11.2
	Power Input	kW	2.99	2.99
	Pdesign	kW	9.5	9.5
	SEER/Energy Efficiency Class		5.28/A	5.28/A
	Seasonal Energy Consumption	kWh/a	629	629
Heating EN14825	Range Min. - Max.	kW	3.0 - 13.0	3.0 - 13.0
	Power Input	kW	2.99	2.99
	Pdesign	kW	7.60	7.6
	SCOP/Energy Efficiency Class		4.19/A+	4.19/A+
	Seasonal Energy Consumption	kWh/a	2537	2537

Indoor Data				
Air Flow	High - Medium - Low	l/s	583 - 458 - 350	583 - 458 - 350
	High - Medium - Low	m3/h	2100 - 1650 - 1260	2100 - 1650 - 1260
External Static Pressure	Standard (Upper - Lower)	Pa	50 (120 - 30)	50 (120 - 30)
Sound	Pressure High - Medium - Low	dB(A)	40 - 36 - 33	40 - 36 - 33
	Power High - Medium - Low	dB(A)	63 - 58 - 54	63 - 58 - 54
Unit	Height x Width x Depth	mm	275 x 1400 x 750	275 x 1400 x 750
	Weight	kg	41	41
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 -3/8	5/8 -3/8
	Drain Port Connection Upper - Lower	mm	VP25 - VP25	VP25 - VP25
	Lift Pump Drain Height from Unit Base		< 850	< 850
			Full Specification	Full Specification

Accessories

RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Remote Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AMSU52-E	Remote Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)
TCB-SF56C6BPE	Discharge Spigot 2 x 200 mm - RAV-HM40#_56#BTP-E
TCB-SF80C6BPE	Discharge Spigot 3 x 200 mm - RAV-HM80#BTP-E
TCB-SF160C6BPE	Discharge Spigot 4 x 200 mm - RAV-HM110#_160#BTP-E

Related items:

- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

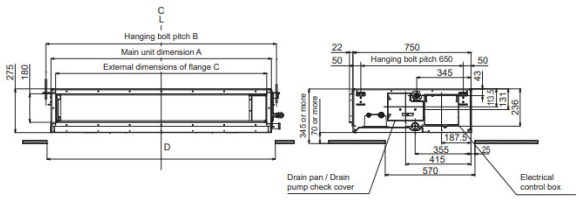

1101