


RAV - Digital Inverter - High Wall - 901 - 1ph

- Enhanced filtration system
- Optimum and uniform air distribution
- Compatible with Wi-Fi when utilising adapter
- Sleek and compact suitable for all applications
- Self-cleaning feature to prevent mould formation



Retail Price (interactive icons):

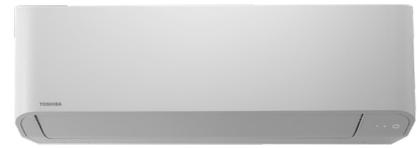

Hi - Res Image

STANDARD PRODUCT RANGE

Performance			
Indoor Unit		RAV-	HM901KRTP-E
Outdoor Unit		RAV-	GM901ATP-E
Nominal	Cooling Capacity	kW	8.0
	Heating Capacity	kW	9.0
	EER/COP	W/W	3.00/3.10
UK	Cooling Total/Sensible	kW	7.83/6.35
	Heating	kW	6.12
Cooling EN14825	Range Min. - Max.	kW	1.9 - 8.8
	Power Input	kW	2.67
	Pdesign	kW	6.7
	SEER/Energy Efficiency Class		6.10/A++
	Seasonal Energy Consumption	kWh/a	459
Heating EN14825	Range Min. - Max.	kW	1.6 - 9.9
	Power Input	kW	2.90
	Pdesign	kW	5.1
	SCOP/Energy Efficiency Class		4.10/A+
	Seasonal Energy Consumption	kWh/a	2151


Indoor Data			
Air Flow	High - Medium - Low	l/s	328 - 253 - 189
	High - Medium - Low	m3/h	1180 - 910 - 680
Sound	Pressure High - Medium - Low	dB(A)	47 - 41 - 35
	Power High - Medium - Low	dB(A)	62 - 56 - 50
Unit	Height x Width x Depth	mm	320 x 1050 x 250
	Weight	kg	14
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 -3/8
	Drain Pipe Connection OD/ID	mm	VP16/14
Remote controller			WH-TA09NE Full Specification

Accessories

RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Related items:

- [BIM files](#)
- [CAD files](#)
- [Airflow/ fan curve](#)
- [Dimensional drawing](#)
- [Wiring diagram](#)
- [Noise curve data](#)
- [Installation manual](#)

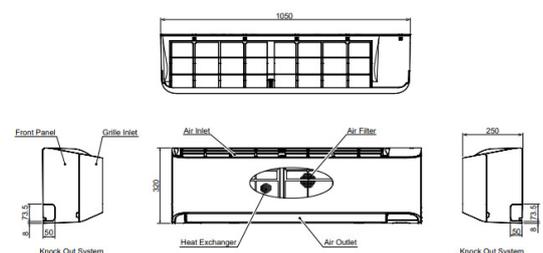

901