

RAV - Digital Inverter - Outdoor Units - 561 & 801

- Quiet operation as low as 33dB (A)
- Standby power consumption reduced by 50% to 6W
- Up to 12.8 kW in only 890mm height and 69kg weight
- Wide ambient range: cooling -15°C to +46°C heating +15°C to -15°C
- Power limitation by 1% step between 50% and 100% load for optimal capacity control



Hi - Res Image



Retail Price (interactive icons):




STANDARD PRODUCT RANGE

Performance		STANDARD PRODUCT RANGE		
Outdoor Unit		RAV	GM561ATP-E1	GM801ATP-E
Operating Range	Cooling	C°	-15 to 46	-15 to 46
	Heating		-15 to 15	-15 to 15
Air Flow	High	m ³ /h - l/s	2400 - 667	2700 - 750
Sound	Pressure High Cooling/Heating	dB(A)	46 - 48	48 - 52
	Power High Cooling/Heating	dB(A)	63 - 65	65 - 69
Unit	Height x Width x Depth	mm	550 x 780 x 290	550 x 780 x 290
	Weight	kg	40	44
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4	5/8 - 3/8
	Min.-Max. Length	m	5 - 30	5 - 30
	Maximum Height Difference	m	±30	±30
	Drain Port Connection	mm	16	16
Refrigerant Charge	Gas - Base Charge/Chargeless Length	m	R32 - 0.9/20	R32 - 1.3/20
	Additional Charge Liquid Side	g/m	20	35
Run Current	Maximum	Amps	7.31	10.40
Power Cable	Outdoor to Indoor		3 core + earth	3 core + earth
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-16	220-240/1/50-16

Related items:

- [BIM files](#)
- [CAD files](#)
- [Refrigerant cycle diagram](#)
- [Dimensional drawing](#)
- [Wiring diagram](#)
- [Noise curve data](#)
- Installation manual - [561](#) / [801](#)

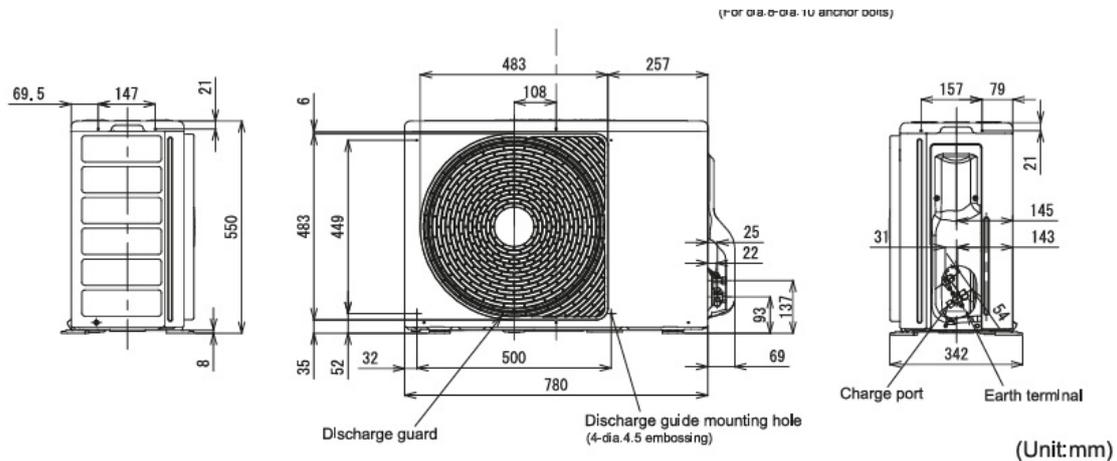

[561 / 801](#)