

## RAV - Super Digital Inverter - Outdoor Units 1601 - 3ph

- Quiet operation as low as 33dB (A)
- Ability to operate down to a 10% load
- Precise capacity control at all conditions
- Standby power consumption reduced by 50% to 6W
- Wide ambient range: cooling -15°C to +52°C heating +15°C to -27°C



Retail Price (interactive icons):

UK



ROI




Hi - Res Image

### HIGH TIER PRODUCT RANGE

Performance		RAV	GP1601AT8-E
Outdoor Unit			
Operating Range	Cooling	C°	-15 to 46
	Heating		-20 to 15
Air Flow	High	m <sup>3</sup> /h - l/s	6180 - 1717
Sound	Pressure High Cooling/Heating	dB(A)	51 - 53
	Power High Cooling/Heating	dB(A)	68 - 70
Unit	Height x Width x Depth	mm	1340 x 900 x 320
	Weight	kg	95
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Min.-Max. Length	m	3-75
	Maximum Height Difference	m	±30
	Drain Port Connection	mm	16
Refrigerant R32	Base Charge/Chargeless Length	m	R32 - 2.6/30
	Additional Charge Liquid Side	g/m	40
Run Current	Maximum	Amps	7.55
Power Cable	Outdoor to Indoor		3 core + earth
Power Supply	Suggested Fuse Size	V/ph/Hz-A	380-415/3/50-16

### Related items:

- [BIM files](#)
- [CAD files](#)
- [Refrigerant cycle diagram](#)
- [Dimensional drawing](#)
- [Wiring diagram](#)
- [Noise curve data](#)
- Installation manual [1ph](#) & [3ph](#)

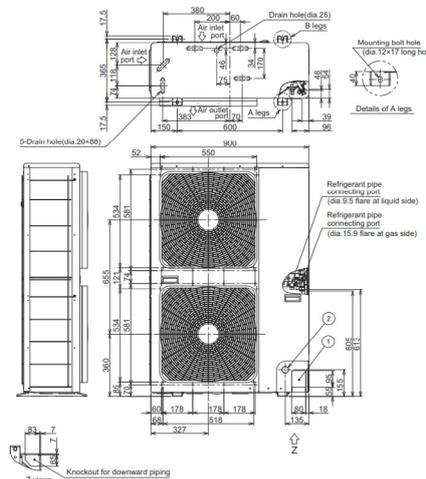

1601