


VHR 400-CF

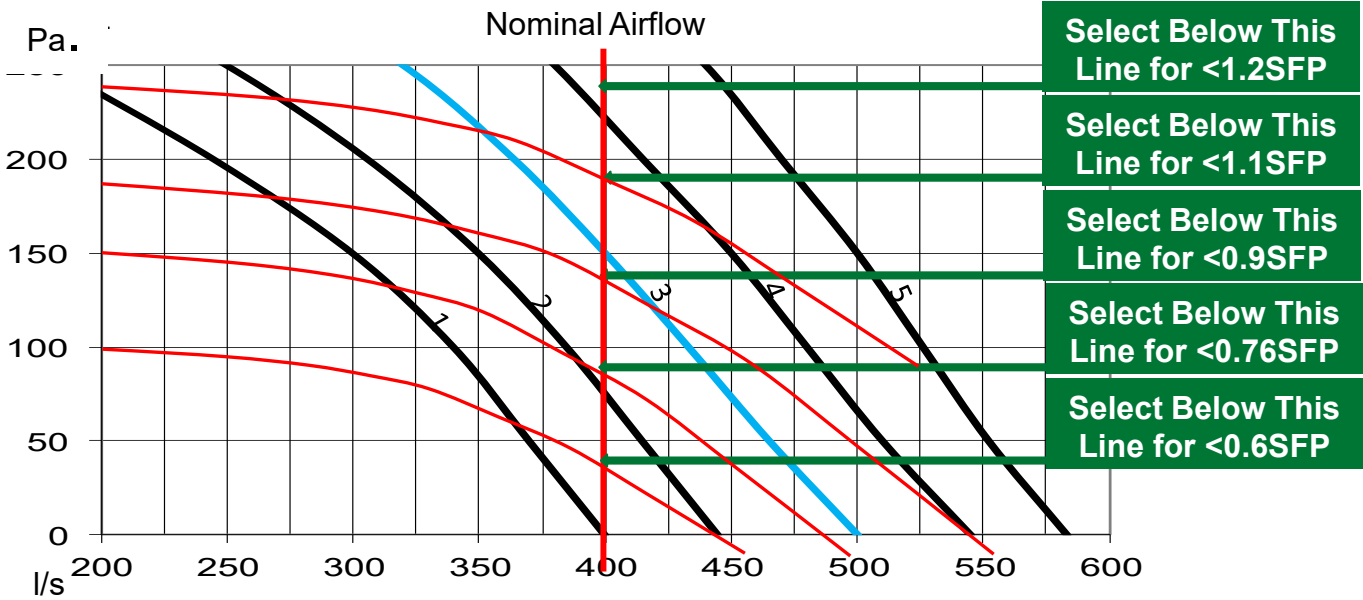

Note: Allow additional 40Pa. For ePM2.5 (F7) Filter (if selected)

VHR-CF 400 Airflow (l/s) vs Resistance (Pa)							
Selection	0	50	100	150	200	250	Voltage
Curve 1	400	370	340	300	245	180	5.0
Curve 2	445	415	385	350	306	250	6.0
Curve 3	500	465	433	400	364	320	7.0
Curve 4	545	510	480	450	415	380	8.0
Curve 5	583	552	526	500	470	440	9.0

VHR-CF400 In-Duct Sound Power Data dB (Ref. 10 ⁻¹² W)										
		63	125	250	500	1k	2k	4k	8k	Breakout @3m (dBA)
Curve 1	S.A. / E.A.	48	61	50	58	59	56	49	44	27
Curve 1	F.A. / R.A.	45	58	47	55	56	53	46	41	
Curve 2	S.A. / E.A.	50	63	52	60	61	58	51	46	29
Curve 2	F.A. / R.A.	47	60	49	57	58	55	48	43	
Curve 3	S.A. / E.A.	52	65	54	62	63	60	53	48	31
Curve 3	F.A. / R.A.	49	62	51	59	60	57	50	45	
Curve 4	S.A. / E.A.	54	67	56	64	65	62	55	50	33
Curve 4	F.A. / R.A.	51	64	53	60	62	59	52	47	
Curve 5	S.A. / E.A.	56	69	58	66	67	64	57	52	35
Curve 5	F.A. / R.A.	53	66	55	63	64	61	54	49	