


VHR-CF Commercial Void Mounted  
Heat Recovery Unit Range  
Installed Duty: 25l/s – 600l/s  
Up to 90% Efficient Heat Reclaim

ULTRA LOW Profile Design

BB101 Compliant

**0.9  
W/I/s  
TOTAL SFP**


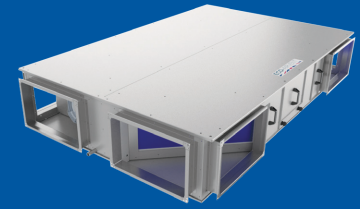


FULLY COMPLIANT WITH  
NON-DOMESTIC BUILDING  
SERVICES DIRECTIVE 2013

ERP2018 COMPLIANT

100,000 HOUR LONG  
LIFE EC FANS

100% SUMMER BYPASS

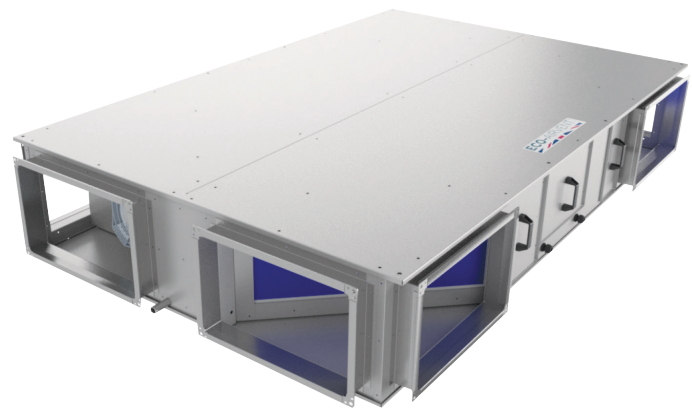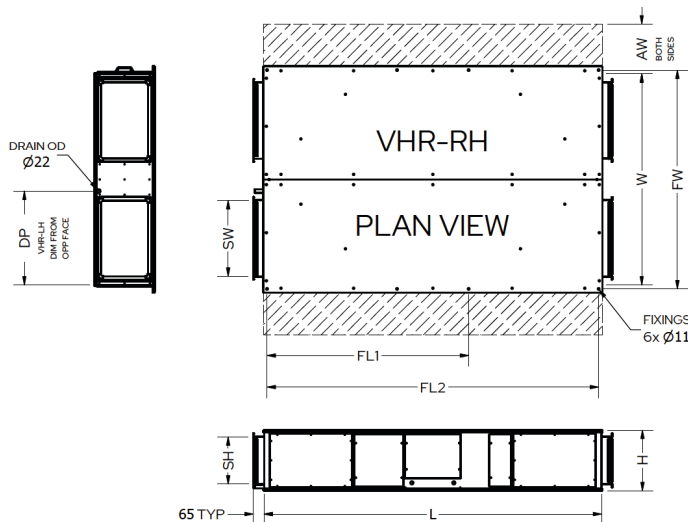

| VHR DIMENSIONS |           |      |     |        |     |          |      |      |        |       |        |
|----------------|-----------|------|-----|--------|-----|----------|------|------|--------|-------|--------|
|                | MAIN BODY |      |     | SPIGOT |     | MOUNTING |      |      | ACCESS | DRAIN | WEIGHT |
| VHR            | L         | W    | H   | SW     | SH  | FW       | FL1  | FL2  | AW     | DP    | kg     |
| 50             | 890       | 590  | 250 | Ø200   |     | 630      | N/A  | 860  | 300    | 250   | 65     |
| 100            | 1390      | 750  | 270 | 200    | 190 | 795      | N/A  | 1355 | 400    | 305   | 86     |
| 150            | 1725      | 975  | 300 | 300    | 220 | 1020     | 1058 | 1690 | 500    | 420   | 126    |
| 260            | 2000      | 1250 | 300 | 450    | 220 | 1295     | 1195 | 1965 | 600    | 557   | 175    |
| 300            | 2000      | 1250 | 360 | 450    | 280 | 1295     | 1195 | 1965 | 600    | 557   | 190    |
| 400            | 2000      | 1250 | 440 | 450    | 360 | 1295     | 1195 | 1965 | 600    | 557   | 200    |
| 500            | 2000      | 1250 | 550 | 450    | 480 | 1295     | 1195 | 1965 | 600    | 557   | 350    |