

- 



UK 


ROI 

Hi - Res Image

HIGH TIER PRODUCT RANGE

Performance				
Outdoor Unit		RAV	GP1103AT8P-E	GP1403ATP-E
Operating Range	Cooling/Heating	°C	-20 to 52/-27 to 15	-20 to 52/-27 to 15
Air Flow	High	m3/h - l/s	7000 - 1944	8000 - 2222
Sound	Pressure High Cooling/Heating	dB(A)	50 - 50	53 - 53
	Power High Cooling/Heating	dB(A)	65 - 65	68 - 68
Unit	Height x Width x Depth	mm	1640 x 1100 x 460	1640 x 1100 x 460
	Weight	kg	126	126
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 -3/8	5/8 -3/8
	Min.-Max. Length	m	3 - 100	3 - 100
	Maximum Height Difference	m	±30	±30
	Drain Port Connection	mm	16	16
Refrigerant	Base Charge/Chargeless Length	m	3.30/30	R32 - 3.3/30
	Additional Charge Liquid Side	g/m	35	35
Run Current	Maximum	Amps	13.70	15.20
Power Cable	Outdoor to Indoor		3 core + earth	3 core + earth
Power Supply	Suggested Fuse Size	V/ph/Hz-A	380-415/3/50-20	220-240/1/50-20

- [BIM files](#)
- [CAD files](#)
- [Refrigerant cycle diagram](#)
- [Dimensional drawing](#)
- [Wiring diagram](#)
- Noise curve data - [1103](#) / [1403](#)
- [Data book](#)
- Installation manual - [1103](#) / [1403](#)

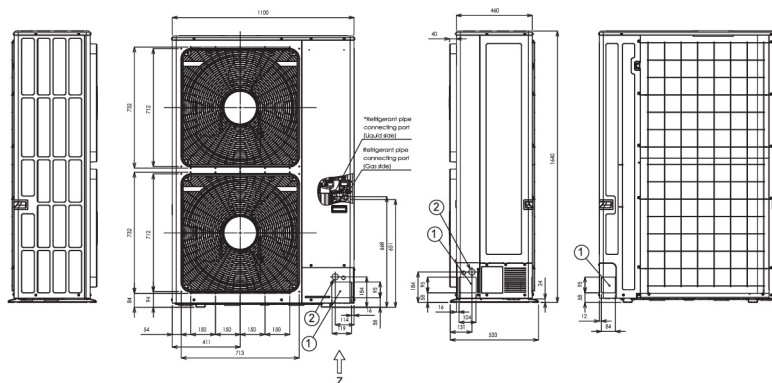

1103 / 1403