


RAV - Digital Inverter - Compact 4-way Cassette - 561 & 701 - 1ph

- Compact thin chassis 575 x 575mm
- Lightweight and compact for easy to installation
- Optional occupancy sensor detects human presence
- 5 Step air flow control as well as Individual louvre control
- Designed to fit within T-bar of the ceiling grid: 620 x 620mm



Retail Price (interactive icons):



Hi - Res Image



Supporting resources, including BIM & CAD files, technical drawings, manuals and product documentation, are available in the Related Items section below.

STANDARD PRODUCT RANGE


Performance				
Indoor Unit		RAV-	HM561MUTP-E	HM701MUTP-E
Outdoor Unit		RAV-	GM563ATP-E	GM703ATP-E
Nominal	Cooling Capacity	kW	5.0	6.1
	Heating Capacity	kW	5.3	7.0
	EER/COP	W/W	3.13 / 3.61	3.00 / 3.04
UK	Cooling Total/Sensible	kW	4.88 / 3.82	4.96 / 4.19
	Heating	kW	3.47	4.60
Cooling EN14825	Range Min. - Max.	kW	1.5 - 5.6	1.7 - 6.5
	Power Input	kW	1.60	2.03
	Pdesign	kW	5.0	6.1
	SEER/Energy Efficiency Class		6.19 / A++	6.32 / A++
	Seasonal Energy Consumption	kWh/a	283	338
Heating EN14825	Range Min. - Max.	kW	1.5 - 6.3	1.6 - 7.3
	Power Input	kW	1.47	2.30
	Pdesign	kW	2.8	3.5
	SCOP/Energy Efficiency Class		4.40 / A+	4.18 / A+
	Seasonal Energy Consumption	kWh/a	891	1172
Indoor Data				
Air Flow	High - Medium - Low	l/s	221 - 187 - 152	233 - 192 - 152
	High - Medium - Low	m3/h	798 - 672 - 546	840 - 693 - 546
Sound	Pressure High - Medium - Low	dB(A)	44 - 39 - 35	44 - 40 - 35
	Power High - Medium - Low	dB(A)	59 - 54 - 50	59 - 55 - 50
Unit	Height x Width x Depth	mm	256 x 575 x 575	256 x 575 x 575
	Weight	kg	16	16
Panel	Height x Width x Depth	mm	12 x 620 x 620	12 x 620 x 620
	Weight RBC-UM21P-E	kg	2.5	2.5
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	VP26/20	VP26/20
			Full Specification	Full Specification

Accessories

RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)
RBC-AXU31UMP-E	Remote Controller - Wireless Receiver Kit for 4-Way Compact Cassette (White)
RBC-AXU31UMPB-E	Remote Controller - Wireless Receiver Kit for 4-Way Compact Cassette (Black)

Related items:

- [BIM files](#)
- [CAD files](#)
- [Airflow/ fan curve - 561 / 701](#)
- [Dimensional drawing](#)
- [Wiring diagram - 561 / 701](#)
- [Noise curve data - 561 / 701](#)
- [Data book](#)
- [Installation manual](#)

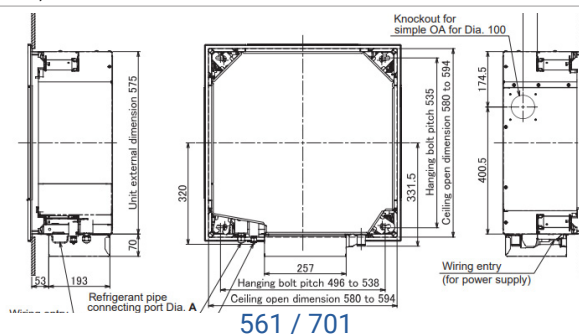

[561 / 701](#)