


Toshiba Air Conditioning Data Sheet

RAV-RM1601UTP-E
4-Way Cassette

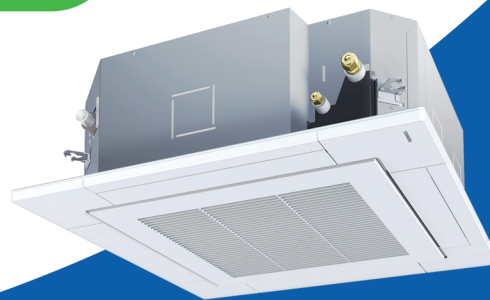

Model Reference		RAV-RM1601UTP-E	
Nominal	Cooling Capacity	kW	14.0
	Heating Capacity	kW	16.0
	EER/COP	W/W	3.23/3.74
UK	Cooling Total / Sensible	kW	13.3/9.70
	Heating	kW	10.45
Cooling EN14825	Range Min-Max	kW	2.6 - 16.0
	Power Input	kW	4.34
	Pdesign	kW	14.0
	SEER/Energy Efficiency Class		6.72/265.8
	Seasonal Energy Consumption	kWh/a	1249
Heating EN14825	Range Min-Max	kW	2.4 - 19.0
	Power Input	kW	4.28
	Pdesign	kW	9.5
	SCOP/Energy Efficiency Class		4.36/171.4
	Seasonal Energy Consumption	kWh/a	3049
Airflow	High - Medium - Low	l/s	592 - 417 - 350
	High - Medium - Low	m ³ /h	2130 - 1500 - 1260
Sound	Pressure: High - Medium - Low	dB(A)	45 - 40 - 36
	Power: High - Medium - Low	dB(A)	60 - 55 - 51
Dimensions	Height x Width x Depth	mm	319 x 840 x 840
	Weight	kg	24
Panel	Height x Width x Depth	mm	30 x 950 x 950
	Weight	kg	4.2
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection Upper - lower	mm	VP32/25
	Lift Pump Drain Height from Base	mm	
Remote Controller			Optional
Power Cable	Outdoor to Indoor		3 core + earth

* Waiting for published data

TOSHIBA

- Redesigned for use with refrigerant R32
- Self-cleaning function
- Lift pump up to 850 mm lift
- Individual setting of louvre position
- Wireless remote control and optional wired remote controller and timer

