RAV - Digital Inverter - Standard 4-Way Cassette - 1601 - 1ph & 3ph

- Built-in high-lift drain pump
- Individual setting of louvre position
- Self-cleaning function and Ag-ion tip
- Compatible with WI-FI when utilising adapter
- Compact light weight chassis for easy installation



Retail Price (interactive icons):

Hi - Res Image

STANDARD PRODUCT RANGE				
Performance				
Indoor Unit		RAV-	HM1601UTP-E	HM1601UTP-E
Outdoor Unit		RAV-	GM1601ATP-E	GM1601AT8P-E
Nominal	Cooling Capacity	kW	14.0	14.0
	Heating Capacity	kW	16.0	16.0
	EER/COP	W/W	3.12/3.61	3.12/3.61
UK	Cooling Total/Sensible	kW	13.30/9.70	13.30/9.70
	Heating	kW	10.88	10.88
Cooling EN14825	Range Min. - Max.	kW	3.0 - 16.0	3.0 - 16.0
	Power Input	kW	4.49	4.49
	Pdesign	kW	12.0	12.0
	SEER/Energy Efficiency Class		6.30/249.0	6.30/249.0
	Seasonal Energy Consumption	kWh/a	1033	1033
Heating EN14825	Range Min. - Max.	kW	3.0 - 18.0	3.0 - 18.0
	Power Input	kW	4.43	4.43
	Pdesign	kW	8.0	8.0
	SCOP/Energy Efficiency Class		4.35/171.0	4.35/171.0
	Seasonal Energy Consumption	kWh/a	2575	2575

Indoor Data				
Air Flow	High - Medium - Low	l/s	592 - 408 - 350	592 - 408 - 350
	High - Medium - Low	m3/h	2130 - 1470 - 1260	2130 - 1470 - 1260
Sound	Pressure High - Medium - Low	dB(A)	45 - 40 - 36	45 - 40 - 36
	Power High - Medium - Low	dB(A)	60 - 55 - 51	60 - 55 - 51
Unit	Height x Width x Depth	mm	319 x 840 x 840	319 x 840 x 840
	Weight	kg	24	24
Panel	Height x Width x Depth	mm	30 x 950 x 950	30 x 950 x 950
	Weight RBC-U33P-E	kg	4.2	4.2
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 -3/8	5/8 -3/8
	Drain Pipe Connection OD/ID	mm	VP32/25	VP32/25
			Full Specification	Full Specification

Accessories

RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and backlight display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and backlight display as well as power-save functions, multilingual (inc. Bluetooth)
RBC-U33PB-E	Ceiling Panel (Black) - Universal for all model sizes
RBC-AXU33UP-E	Remote Controller - Wireless Receiver Kit for 4-Way Cassette (White)
RBC-AXU33UPB-E	Remote Controller - Wireless Receiver Kit for 4-Way Cassette (Black)

Related items:

- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

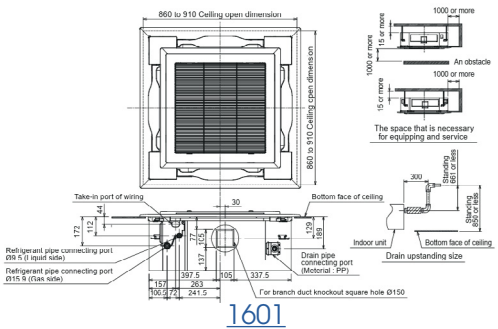

1601