

Toshiba Air Conditioning - VRF Data Sheet

MMK-AP0093H High-Wall

Features


- Compact and lightweight 15 kg
- Outstanding sound levels down to 28 dB(A)
- Automatic louvre swing pattern to distribute the air evenly into the room
- Infra-red or hard-wired remote controller option



Technical Data

Model reference		MMK-AP0093H
Nominal cooling	kW	2.8
Nominal heating	kW	3.2
Capacity code		1.0
Power input (cool/heat)	kW	0.021
UK cooling	kW	2.68
UK sensible cooling	kW	2.01
UK heating	kW	2.59
Starting current	A	0.24
Running current	A	0.19
Suggested fuse size	A	5
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	52-47-43
Sound pressure H-L	dB(A)	37-28
Air flow H-L	m ³ /h	600-390
Air flow H-L	l/s	167-117
Dimensions (H x W x D)	mm	320 x 1050 x 228
Unit weight	kg	15

Dimensional Drawings

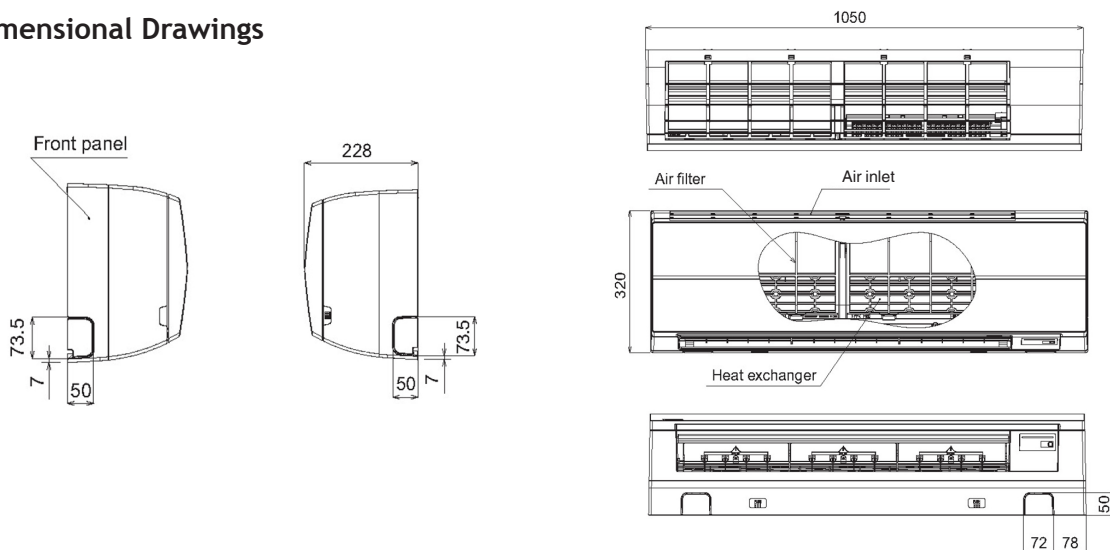

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

