

## Toshiba Air Conditioning - RAV-RM Data Sheet

### RAV-RM561SDT-E Slim Ducted

#### Features



- External static pressure can be raised up to 44 Pa
- Low noise: low fan speed down to 36 dB(A)
- Fresh air intake
- Natural drain port and lift pump (up to 850 mm lift)
- Ideal for restricted ceiling voids only 210 mm high
- Base or rear return air



#### Technical Data

Model reference		RAV-RM561SDT-E	
Nominal	Cooling Capacity	kW	5.0
	Heating Capacity	kW	5.3
	EER/COP	W/W	2.62/3.53
UK	Cooling Total/Sensible	kW	4.80/3.30
	Heating	kW	3.79
Cooling EN14825	Range Min. - Max.	kW	1.5 - 5.6
	Power Input	kW	1.91
	Pdesign	kW	5.0
	SEER/Energy Efficiency Class		5.14/A
	Seasonal Energy Consumption	kWh/a	346
Heating EN14825	Range Min. - Max.	kW	1.5 - 6.3
	Power Input	kW	1.5
	Pdesign	kW	2.8
	SCOP/Energy Efficiency Class		4.16/A+
	Seasonal Energy Consumption	kWh/a	1517
Air Flow	High - Medium - Low	l/s	217 - 188 - 162
	High - Medium - Low	m <sup>3</sup> /h	217 - 188 - 162
External Static Pressure	Standard (Upper - Lower)	Pa	29 (44 - 4)
Sound Pressure	High - Medium - Low	dB(A)	45 - 40 - 36
	High - Medium - Low (Under inlet)	dB(A)	48 - 46 - 43
Sound Power	High - Medium - Low	dB(A)	60 - 55 - 51
	High - Medium - Low (Under inlet)	dB(A)	63 - 61 - 58
Unit	Height x Width x Depth	mm	210 x 845 x 645
	Weight	kg	22
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection Upper - Lower	mm	VP25 - VP20
	Lift Pump Drain Height from Unit Base	mm	< 850
Remote Controller			RBC-AMT32E
Power Cable	Outdoor to Indoor		3 core + earth

#### Dimensional Drawings

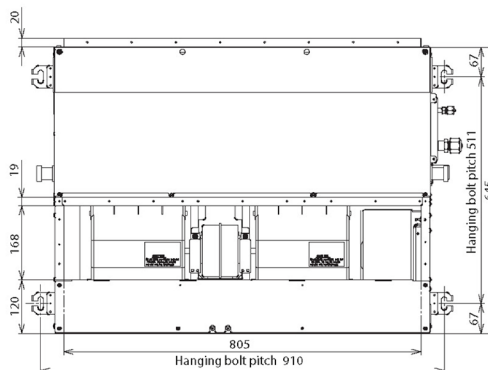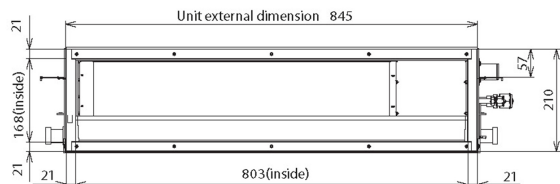

## Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

[www.cdlweb.info](http://www.cdlweb.info)

