

## Toshiba Air Conditioning - VRF Data Sheet

### MMU-AP0097MH-E Compact 4-way cassette

#### Features


- Individual louvre
- Fits within T-bar of ceiling grid
- Optional Occupancy Sensor (TCB-SIR41UM-E)



#### Technical Data

Model reference		MMU-AP0097MH-E
Nominal cooling	kW	2.8
Nominal heating	kW	3.2
Capacity code		1.0
Power input (cool/heat)	kW	0.025
UK cooling	kW	2.5
UK sensible cooling	kW	2.1
UK heating	kW	1.7
Starting current	A	0.43
Running current	A	0.24
Suggested fuse size	A	3
Power supply	V-ph-Hz	220/240-1-50
Interconnecting cable		2-core screened 1.5 mm
Sound power H-M-L	dB(A)	53-48-44
Sound pressure H-M-L	dB(A)	38-33-29
Air flow H-L	m <sup>3</sup> /h	570-378
Air flow H-L	l/s	158-105
Dimensions (H x W x D)	mm	256 x 575 x 575
Unit weight	kg	15
Panel reference		RBC-UM21PG(W)-E
Panel dimensions (H x W x D)	mm	12 x 620 x 620
Panel weight	kg	2.5
Connection (liquid - gas)	mm (inch)	6.4 (1/4) - 9.5 (3/8)
Drain port OD/ID		VP26/20
Drain pump lift	mm	850

#### Dimensional Drawings

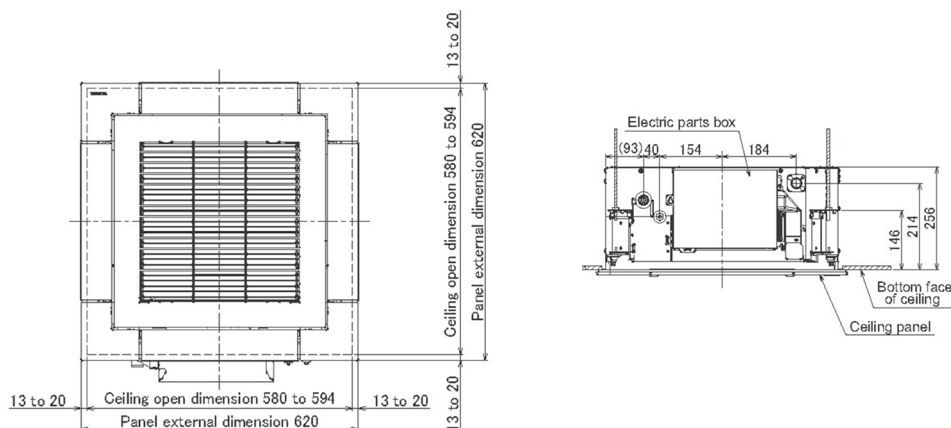

## Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

[www.cdlweb.info](http://www.cdlweb.info)

