

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM561FT-ES Floor-mounted cabinet



Features


- Connectable to both R32 and R410A DI and SDI outdoor units
- Large capacity range: cooling capacities from 5 kW to 16 kW, heating capacities from 5.6 kW to 18 kW
- Refrigerant leakage sensor performance guaranteed for 7 years (R32 refrigerant only)
- Remote controller RBC-AMS55E-ES built into indoor cabinet

Technical Data

Model reference			RAV-RM561FT-ES
Nominal	Cooling Capacity	kW	5.0
	Heating Capacity	kW	5.6
	EER/COP	W/W	2.27/3.27
UK	Cooling Total/Sensible	kW	-.*
	Heating	kW	-.*
Cooling EN14825	Range Min. - Max.	kW	1.2 - 5.6
	Power Input	kW	2.20
	Pdesign	kW	-.*
	SEER/Energy Efficiency Class		5.33/A
Heating EN14825	Range Min. - Max.	kW	0.9 - 7.0
	Power Input	kW	1.71
	Pdesign	kW	-.*
	SCOP/Energy Efficiency Class		3.91/A
Air Flow	High - Low	L/s	228 - 167
	High - Low	m ³ /h	820 - 600
Sound	Pressure High - Medium - Low	dB(A)	46 - 42 - 38
	Power High - Medium - Low	dB(A)	60 - 56 - 52
Unit	Height x Width x Depth	mm	1750 x 600 x 210
	Weight	kg	44
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
Remote Controller			RBC-AMS55E-ES
Power Cable	Outdoor to Indoor		3 core + earth

* Waiting for published data.

Dimensional Drawings

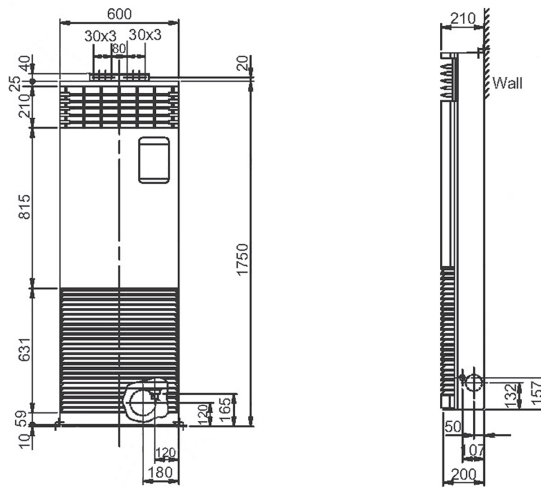

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info

