


Toshiba Air Conditioning Data Sheet

MMK-UP0181HP-E
VRF HIGH WALL

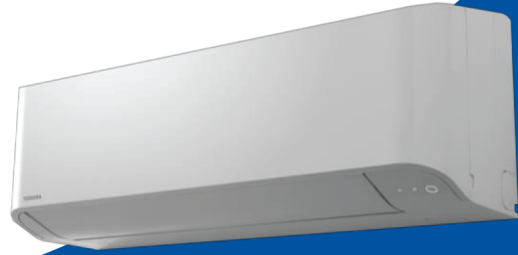

Model Reference		MMK-UP0181HP-E	
Capacity Code	Cooling Capacity	HP	2.0
Nominal	Heating Capacity	kW	5.6
	Cooling Total/Sensible	kW	6.3
UK	Heating	kW	5.1/3.7
	Power Input	kW	4.3
Electrical	Run Current	kW	0.032
	Start Current	Amps	0.29
		Amps	0.38
Air Flow	High - Medium - Low	l/s	250 - 200 - 153
	High - Medium - Low	m ³ /h	900 - 720 - 550
Sound	Pressure High - Medium - Low	dB(A)	41 - 37 - 32
	Power High - Medium - Low	dB(A)	56 - 52 - 47
Unit	Height x Width x Depth	mm	293 x 1050 x 250
	Weight	kg	16
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	16/14
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5
Remote Controller			WH-TA09NE (Infra-Red)

^/* Awaiting published data

TOSHIBA

- The unit is compact and lightweight, it is perfect for installation above the doors or in narrow corridors.
- New appearance, simple, elegant with nice led display.
- Special fin coating for Healthy & Fresh air.
- Ultra pure filter (818F0050) available as an option to ensure healthy and pleasant atmosphere.
- Remote controller for easy access to the preferred setting.
- Filters for dust collection can be easily removed by lifting the front panel and can be cleaned easily washing them under running water.

MMK-UP0151HP(L)* / MMK-UP0181HP(L)* / MMK-UP0241HP(L)*

