


Toshiba Air Conditioning Data Sheet

RAS-B16E2KVG-E
SEIYA (E2) INDOOR UNIT

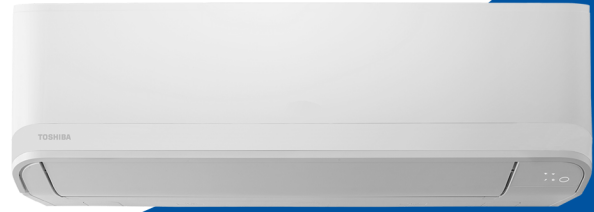

Model Reference		RAS-B16E2KVG-E	
Nominal	Cooling Capacity	kW	4.2
	Heating Capacity	kW	5.0
	EER/COP	W/W	3.31/3.73
UK	Cooling Total/Sensible	kW	4.49/3.36
	Heating	kW	3.33
Cooling EN14825	Range Min. - Max.	kW	1.40 - 4.70
	Power Input	kW	1.27
	Pdesign	kW	4.2
	SEER/Energy Efficiency Class		7.00/A++
	Seasonal Energy Consumption	kWh/a	210
Heating EN14825	Range Min. - Max.	kW	1.30 - 6.00
	Power Input	kW	1.34
	Pdesign	kW	3.6
	SCOP/Energy Efficiency Class		4.60/A++
	Seasonal Energy Consumption	kWh/a	1095
Air Flow	High - Low	l/s	213 - 92
	High - Low	m ³ /h	760 - 330
Sound	Pressure High - Low	dB(A)	43 - 22
	Power High	dB(A)	56
Unit	Height x Width x Depth	mm	293 x 798 x 230
	Weight	kg	9
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2" - 1/4"
	Drain Pipe Connection OD/ID	mm	16/14
Remote controller			WH-TG01NE

TOSHIBA

- invisible piping cut-out
- ultra fresh filter
- new remote control
- wireless adapter is supported and can be installed inside the indoor unit
- supports energy monitoring; remote control is connectable with wires and dustless heat exchanger

