RAV - Digital Inverter - Standard 4-Way Cassette - 1101 - 1ph & 3ph

- Built-in high-lift drain pump
- Individual setting of louvre position
- Self-cleaning function and Ag-ion tip
- Compatible with WI-FI when utilising adapter
- Compact light weight chassis for easy installation



Retail Price (interactive icons):

Hi - Res Image

STANDARD PRODUCT RANGE				
Performance				
Indoor Unit		RAV-	HM1101UTP-E	HM1101UTP-E
Outdoor Unit		RAV-	GM1101ATP-E	GM1101AT8P-E
Nominal	Cooling Capacity	kW	9.5	9.5
	Heating Capacity	kW	11.2	11.2
	EER/COP	W/W	3.31/3.82	3.31/3.82
UK	Cooling Total/Sensible	kW	9.10/7.56	9.10/7.56
	Heating	kW	8.01	8.01
Cooling EN14825	Range Min. - Max.	kW	3.0 - 11.2	3.0 - 11.2
	Power Input	kW	2.87	2.87
	Pdesign	kW	9.5	9.5
	SEER/Energy Efficiency Class		6.15/A++	6.15/A++
	Seasonal Energy Consumption	kWh/a	540	540
Heating EN14825	Range Min. - Max.	kW	3.0 - 13.0	3.0 - 13.0
	Power Input	kW	2.93	2.93
	Pdesign	kW	8.0	8.0
	SCOP/Energy Efficiency Class		4.28/A+	4.28/A+
	Seasonal Energy Consumption	kWh/a	2615	2615

Indoor Data				
Air Flow	High - Medium - Low	l/s	558 - 400 - 325	558 - 400 - 325
	High - Medium - Low	m3/h	2010 - 1440 - 1170	2010 - 1440 - 1170
Sound	Pressure High - Medium - Low	dB(A)	43 - 38 - 33	43 - 38 - 33
	Power High - Medium - Low	dB(A)	58 - 53 - 48	58 - 53 - 48
Unit	Height x Width x Depth	mm	319 x 840 x 840	319 x 840 x 840
	Weight	kg	24	24
Panel	Height x Width x Depth	mm	30 x 950 x 950	30 x 950 x 950
	Weight RBC-U33P-E	kg	4.2	4.2
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 -3/8	5/8 -3/8
	Drain Pipe Connection OD/ID	mm	VP32/25	VP32/25
			Full Specification	Full Specification

Accessories

RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and backlight display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and backlight display as well as power-save functions, multilingual (inc. Bluetooth)
RBC-U33PB-E	Ceiling Panel (Black) - Universal for all model sizes
RBC-AXU33UP-E	Remote Controller - Wireless Receiver Kit for 4-Way Cassette (White)
RBC-AXU33UPB-E	Remote Controller - Wireless Receiver Kit for 4-Way Cassette (Black)

Related items:

- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

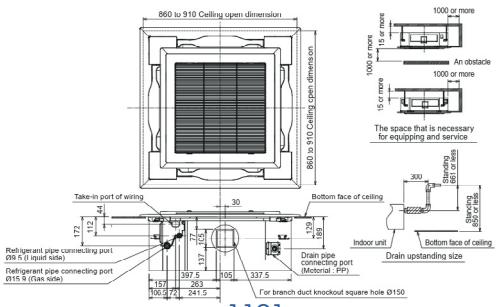

1101